

Intended for
London Borough of Bexley

Document type
Report

Date
August 2019

THAMESMEAD & BELVEDERE

HEAT NETWORK FEASIBILITY STUDY: WORK PACKAGE 2



THAMESMEAD & BELVEDERE HEAT NETWORK FEASIBILITY STUDY: WORK PACKAGE 2

Project name **Thamesmead & Belvedere DHFS**
Project no. **1620005147**
Recipient **London Borough of Bexley**
Document type **Report**
Version **5**
Date **2019-08-09**
Prepared by **OANGE/ACHAT**
Checked by **OPITC**
Approved by **LPADF**

Ramboll
240 Blackfriars Road
London
SE1 8NW
United Kingdom

T +44 (0)20 7631 5291
<https://uk.ramboll.com>

This report is produced by Ramboll at the request of the client for the purposes detailed herein. This report and accompanying documents are intended solely for the use and benefit of the client for this purpose only and may not be used by or disclosed to, in whole or in part, any other person without the express written consent of Ramboll. Ramboll neither owes nor accepts any duty to any third party and shall not be liable for any loss, damage or expense of whatsoever nature which is caused by their reliance on the information contained in this report.

Ramboll UK Limited
Registered in England & Wales
Company No: 03659970
Registered office:
240 Blackfriars Road
London
SE1 8NW

CONTENTS

Executive Summary	3
1. Introduction	7
1.1 Background	7
1.2 Work Package 2 Scope	7
2. Energy Demand Assessment	9
SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)	9
WORK PACKAGE 2 REFINEMENT	10
2.1 Erith Development Areas	10
2.2 Retained Southmere & Parkview Towers	11
2.2.1 Site Visit	11
2.2.2 Revision of Energy Consumption Data	18
2.3 Revisions to Existing Building Loads	19
2.4 Updated Demand Assessment Results	19
3. Energy Supply Assessment	21
SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)	21
WORK PACKAGE 2 REFINEMENT	22
3.1 Cory Engagement	22
3.1.1 Heat Offtake: Technical Arrangements	22
3.1.2 Heat Offtake: Commercial Arrangements	23
3.2 Supplementary Heat Generation & Storage	23
3.2.1 Centralised Heat Generation	23
3.2.2 Heat Storage	24
3.2.3 Distributed Heat Generation	24
4. Energy Distribution Systems	26
SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)	26
WORK PACKAGE 2 REFINEMENT	27
4.1 Existing Buried Infrastructure	27
4.1.1 Utilities and Network Operators	28
4.2 Primary Heat Network Routing	30
4.2.1 Route Assessment	30
4.2.2 Alternative Primary Route Options	34
4.3 Network Hydraulic Modelling	35
4.3.1 Heat Losses	37
4.3.2 Network Layouts	38
4.4 Existing Buildings to Connect	40
4.4.1 Previous Incoming DH Services	40
4.5 Development Connection Arrangements	41
5. Techno-Economic Assessment	42
SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)	42
WORK PACKAGE 2 REFINEMENT	44
5.1 Network CAPEX Refinement for Pipe Sizes	44
5.2 Refined Heat Offtake Facilitation Costs	44
5.3 Refined Heat Offtake Tariff Structure	44
5.4 Network CAPEX Refinement for Pipe Routing	45

5.5	Sources for Capital Funding	45
5.5.1	Heat Networks Investment Programme	45
5.6	Refinement of Heat Sale Tariffs	46
5.6.1	Residential Heat Tariff	46
5.6.2	Non-Residential Heat Tariff	47
5.7	Techno-Economic Modelling Results	48
5.7.1	Refined CAPEX & OPEX	48
5.7.2	IRR and NPVs	50
5.7.3	Cashflow	50
5.7.4	Sensitivity Analyses	51
5.7.5	Dividend Return Analysis	55
6.	CO₂ Emissions Assessment	56
6.1	Counterfactual Definition	56
6.1.1	Counterfactual Emissions Calculation	56
6.2	Network Heat Emissions	58
7.	Conclusions & recommendations	60
7.1	Conclusions	60
7.2	Recommendations	60
8.	Next Steps	61
9.	Study Addendum	62
9.1	Cory Application to Heat Networks Investment Programme (HNIP)	62
9.1.1	Extent of Cory Heat Network	62
9.1.2	Ramboll Support to HNIP Pre-Application	63
9.2	Alternate Next Steps	63

EXECUTIVE SUMMARY

This report presents the findings from the second stage ("Work Package 2") of a detailed techno-economic feasibility study for a new District Energy (DE) network linked to the Cory Energy-from-Waste plant and delivering heat to the Thamesmead & Belvedere area of Bexley.

The broad requirements for this stage of the study were to:

1. Revisit and update previous energy demand assessment work.
2. Refine selection of heat supply plant and infrastructure sizing and routing.
3. Reflect requirements / recommendations for elements of network future-proofing.
4. Produce concept design information for proposed plant and network.
5. Determine network commercial performance and test key sensitivities.
6. Produce supporting techno-economic discounted cashflow model.

As part of this work, additional supporting information was gathered, and meetings held with the following key project stakeholders:

- London Borough of Bexley
- Cory (plus commercial and technical advisors)
- Peabody Housing Association
- Great London Authority (GLA)

The key updates reflected beyond previous Work Package 1 works are as follows:

1. Reflecting Cory modelling and guidance, a heat offtake availability of 90% per annum was reflected within the concept design and techno-economic modelling of the network, accounted for by provision of limited backup gas-fired boiler plant and thermal storage.
2. Network CAPEX build-up was refined to allow for greater resolution of costs, including; design costs and consultancy fees, Planning support costs, Contractor preliminaries, builders work in connection plus system testing and commissioning.
3. Information was gathered on location and types of existing buried utilities present within the proposed extent of the Core Scheme network.
4. Modelling undertaken to determine heat offtake pricing was refined to reflect the more detailed information discussed with and shared by Cory and their partners, including a split to include fixed and variable components.
5. Customer heat pricing was similarly refined and split between fixed and variable components, comprising annual standing charges and heat tariffs, whilst still retaining a 10% discount versus counterfactual provision of heat determined via heat price comparators calculations.
6. Previous assumptions on network transmission and distribution heat losses were replaced with figures determined by hydraulic modelling.

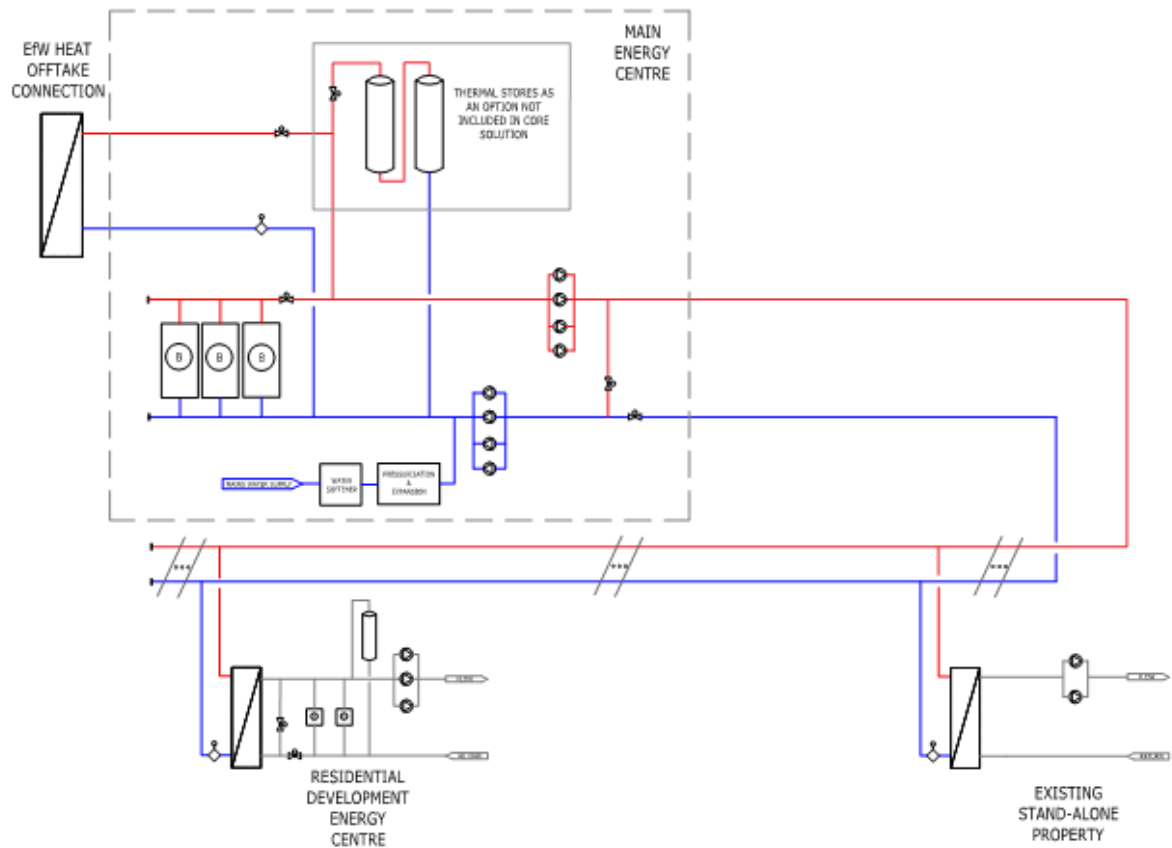


Figure 1: Outline heat network schematic

The key findings from Work Package 2 are as follows:

1. The total level of heat demand and annual consumption determined for all loads modelled for connection to an initial "Core Scheme" network, comprising the Belvedere, Thamesmead and Abbey Wood redevelopment areas (plus limited adjacent existing buildings/sites) can be met via heat offtake from the Cory EfW plant.
2. In line with Cory's proposed annual availability of 90% for heat offtake, the provision of supplementary heat generation and storage is required to meet year-round demand and is proposed to comprise a mix of centralised and distributed plant.
3. The techno-economic modelling undertaken indicates that delivery and operation of a full Core Scheme network could achieve IRRs in the region of 8.3% – 12.3% (depending upon inclusion of its extension into Erith) and positive NPVs, whilst providing competitively priced heat to all connected customers. Additional analysis has tested the sensitivity of these metrics to a range of key parameters, both in isolation and combined.
4. The predicted commercial performance of the project upon full build-out has improved since the earlier Work Package 1 work for the following reasons:
 - a. The previous (conservative) assumption that a network operator would make adoption payments in relation to developers' secondary distribution has been replaced with receipt of connection charges, calculated as the avoided costs to developers of installing the low-carbon heating plant otherwise required.

- b. Figures of gas tariffs and standing charges previously used to determine counterfactual costs have been updated using latest Uswitch data specific to the Borough of Bexley – this has resulted in an increase to base case cost, and therefore also to network heat charges, of 18% whilst retaining provision of a 10% discount.
5. The utilising of heat generated from the Cory plant, at the point of full Core Scheme buildout, could deliver an overall CO₂ saving of 3,970 tonnes/annum against a counterfactual case of new Air-Source Heat Pump plant, adhering to projected new London Plan requirements, or 14,900 tonnes/annum against a case of gas-fired CHP led communal heating schemes.
6. If a more aggressive build-out scenarios were considered for the Core Scheme and additional sites further afield in Bexley and particularly Greenwich, where build-out is closely linked to potential new transport links, further improvement would be seen tot eh network commercial case. It is also likely that a further heat source(s) beyond the existing Cory plant would be required to meet any significant increases to total heat demands.

CARBON INTENSITY OF HEAT

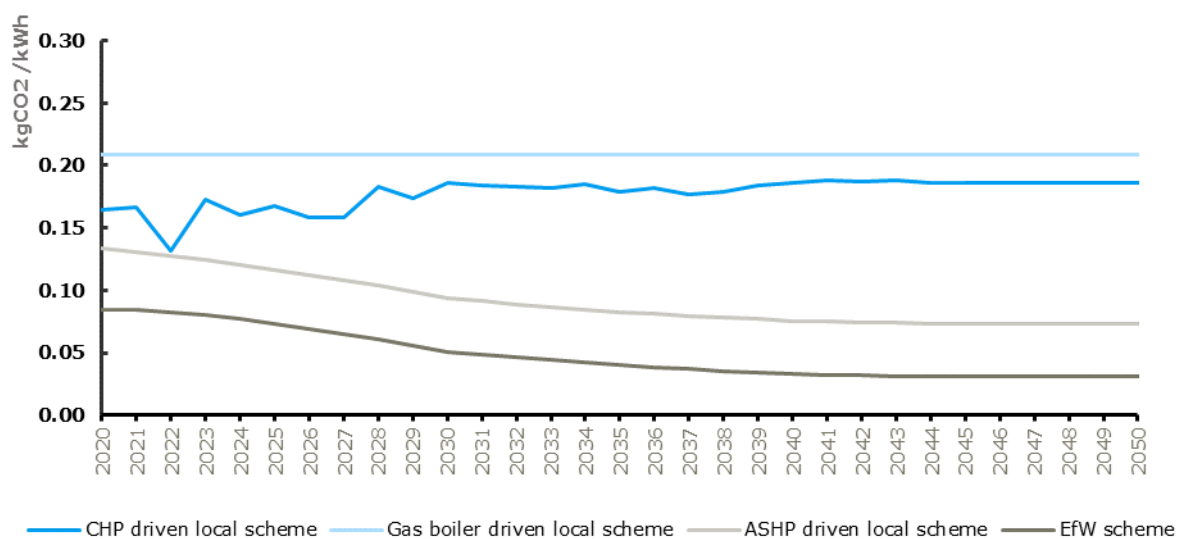


Figure 2: Carbon intensity of DH network heat versus counterfactual scenarios

The recommended next steps for the project are as follows:

- A. Project to be taken forward to the stage of developing an Outline Business Case.
- B. LBB to progress early discussions with Cory over the principles and arrangements for heat offtake pricing (with meetings in this regard already planned).
- C. Engagement with other LBB development partners to be sought to the level already in place with Peabody, with Orbit Homes identified as one such key party.

- D. LBB to consider and determine its key objectives and goals for the network and with this its preferred role and level of engagement going forward in development and delivery of the scheme, as part of wider discussions with known and potential partners.
- E. LBB to continue close working with the GLA, given the strategic importance of the project, to maintain and maximise their support and added value going forward.
- F. Seeking of advice and support from appropriate Commercial and Legal partners to develop draft agreed Heat of Terms for heat sale agreements, expected to involve (at least) Cory and Peabody.
- G. Consider in more detail the option of seeking project capital funding via the Government's HNIP scheme, including identifying the best time during project development to apply for this support.

1. INTRODUCTION

1.1 Background

Ramboll were appointed by the London Borough of Bexley (LBB) in April 2018, under the Greater London Authority (GLA)'s Decentralised Energy Enabling Project (DEEP), to undertake a detailed techno-economic feasibility study for a new District Energy (DE) network linked to the Cory Energy-from-Waste plant and delivering heat to the Thamesmead & Belvedere area of Bexley.

This DE network was initially proposed within the previous Energy Masterplan (EMP) study, undertaken in 2015, following earlier heat mapping work carried out for LBB by Ramboll in 2011.

This study is being carried out across two discrete Work Packages as follows:

- Work Package 1 (WP1): comprising a review and update of previous energy mapping and masterplanning work.
- Work Package 2 (WP2): comprising a detailed techno-economic feasibility study.

This report summarises the works undertaken and findings of **Work Package 2**.

1.2 Work Package 2 Scope

The primary scope items for Work Package 2 were defined as follows:

1. Scheme design and economics should be optimised and include consideration of UK best practice options.
2. Energy demand and assessment work to include:
 - a. Define core demand and supply energy data, including peak and annual loads.
 - b. Split of demands by customer type.
 - c. Undertake site surveys for existing buildings planned for network connection.
3. Energy centre / central plant work to include:
 - a. Determine CO₂ emissions against counterfactual technology case.
 - b. Determine requirements and location for backup/temporary boilers and thermal storage plant.
 - c. Identify plant phasing and associated future-proofing requirements.
 - d. Assess existing utilities infrastructure.
 - e. Produce outline design for recommended scheme, including layouts, schematics, key criteria or outline specifications and GIS representation.
4. Energy distribution systems work to include:
 - a. Hydraulic modelling, optimisation and sizing/selection of heat pipe network for recommended scheme.
 - b. Identification of route constraints and mitigation recommendations.
 - c. Provision of design/operating parameters and an outline network schematic.
5. Techno-economic cashflow modelling to include:
 - a. Provision of costs and income for recommended scheme within a discounted cashflow model, considering a 25, 30 and 40-year life cycle.
 - b. Accompanying documentation of assumptions underpinning cashflow model.
 - c. Short user guide for cashflow model.
 - d. Model outputs to include calculated NPV and IRR across required life cycles.

- e. Inclusion of future phasing options capable of being switched on or off.
- 6. Provision of a Risk & Issues register.

This report has been structured in line with these scope items and also to document how previous work under Work Package 1 has been progressed and developed further.

2. ENERGY DEMAND ASSESSMENT

SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)

Works during Work Package 1 derived a combined heat load for all planned developments and selected existing buildings within the study area totals of 139 GWh/year, at the time of full build-out.

Within this, redevelopment areas in/around Belvedere comprised the largest single heat load cluster with buildout commencing in 2020 and continuing for 35 years, as shown in Figure 3.

HEAT DEMAND DEVELOPMENT

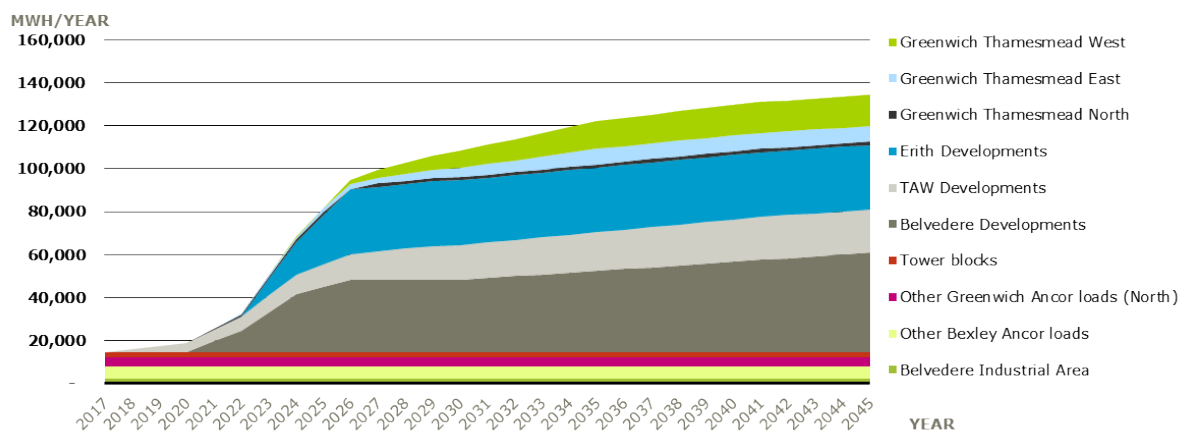


Figure 3: Overall heat demand development

The location, scale and timing of all assessed loads was also assessed, as displayed in Figure 4, with indications given for radial distance of all identified loads from the Cory EfW plant.

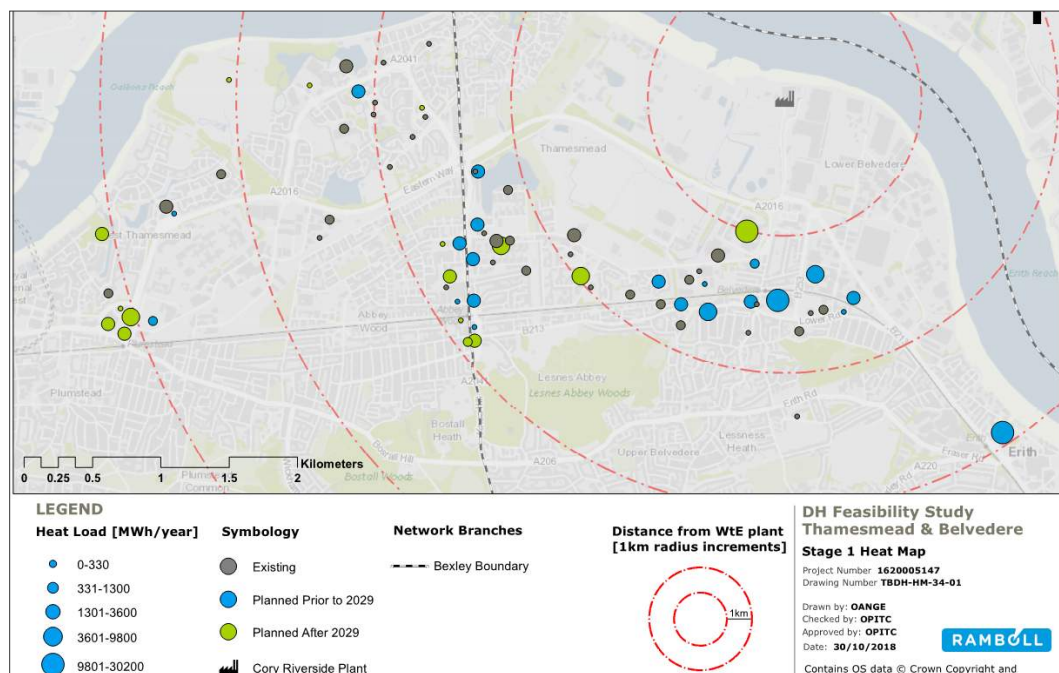


Figure 4: Full assessment area heat map

The following next steps were identified to be undertaken during Work Package 2, to refine and confirm details of energy demand initially modelled:

- i. Further granularity of new residential development quanta to be sought and applied in relation to the Erith area.
- ii. Any energy consumption data available for the retained/refurbished South mere and Parkview residential towers to be sought and applied.
- iii. The status and load information for existing non-residential loads considered for connection to be confirmed and updated as required.
- iv. Any information on existing infrastructure and data available for energy consumption of largest industrial sites within Burt's Wharf to be sought and applied.

WORK PACKAGE 2 REFINEMENT

2.1 Erith Development Areas

As part of work under WP2, a meeting was held with LBB Planners to share the latest details of development intentions and quanta associated with the Erith area. The extent and layout of the development areas for which data was supplied are shown in Figure 5.

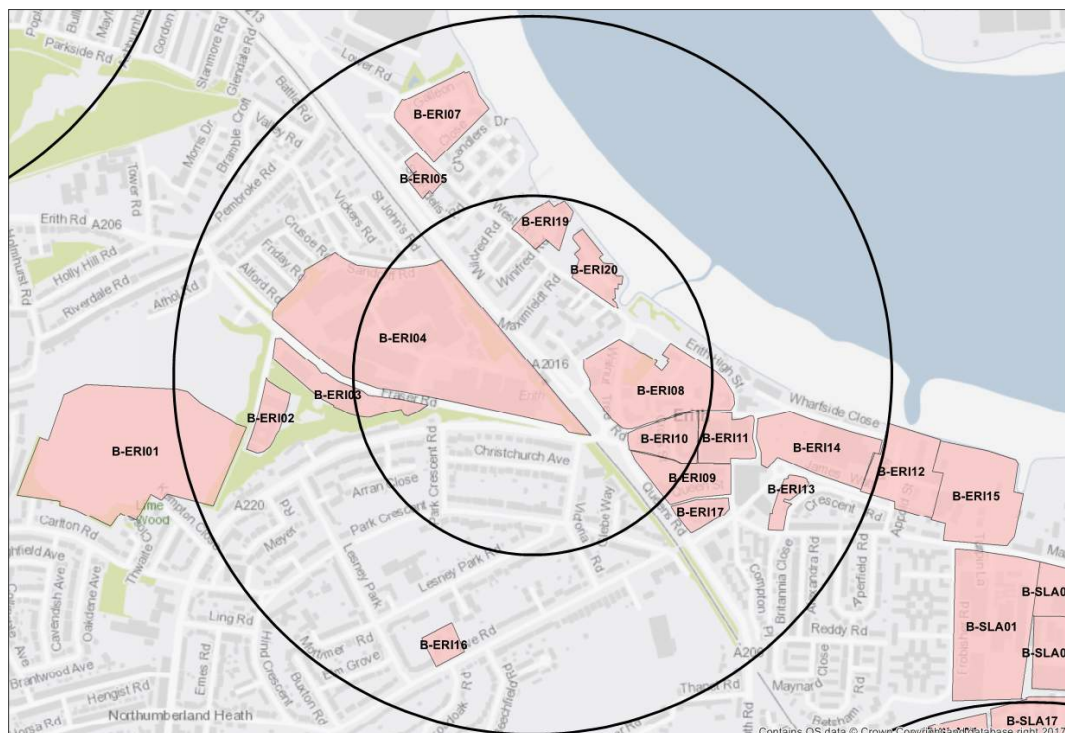


Figure 5: Erith development areas

With a variety of differing development buildout scenarios developed by LBB, it was agreed to reflect and apply the quanta involved with the "2017 SHLAA" figures, being those developed agreed with the GLA.

The provided figures for residential units within each defined development area were used to determine associated heat loads, as displayed within Table 1.

Site ID	SHLAA residential units	Estimated start date	Estimated build-out duration (years)	Heat Demand (on completion)
B-ERI01	514	2016	13	3,335
B-ERI02	39	2029	12	253
B-ERI03	96	2029	12	625
B-ERI04	602	2029	12	3,908
B-ERI05	42	2019	5	272
B-ERI08	410	2019	10	2,659
B-ERI09	201	2024	10	1,302
B-ERI10	111	2024	10	723
B-ERI11	71	2034	7	462
B-ERI12	0	-	-	-
B-ERI13	57	2024	10	369
B-ERI14	286	2024	10	1,854
B-ERI15	0	-	-	-
B-ERI16	31	2016	3	198
B-ERI19	26	2029	12	166
B-ERI20	110	2034	7	717
B-ERI07	-	-	-	-
B-ERI17	-	-	-	-

Table 1: Heat demand for Erith development areas (based on 2017 SHLAA growth scenario)

These figures were used to refine the previous energy demand assessment modelling, replacing the earlier assumptions previously applied around quanta and geography.

2.2 Retained Southmere & Parkview Towers

2.2.1 Site Visit

A site visit was held on 5th March 2019 to the residential tower blocks being retained as part of redevelopment works in the Thamesmead/Abbey Wood area. This visit was facilitated and accompanied by Hugo Buchanan of Peabody and included limited access provision to ground floor plant areas of the towers.

2.2.1.1 Southmere Towers

The Southmere towers were originally served by a district heating network, prior to its replacement with gas supplies to individual flats for local boilers.



Figure 6: Visible external gas distribution pipework to individual flats

During the site visit, evidence of the previous DH arrangement was seen via a combination of access points within roadways and also remaining above-ground sections of pipework.

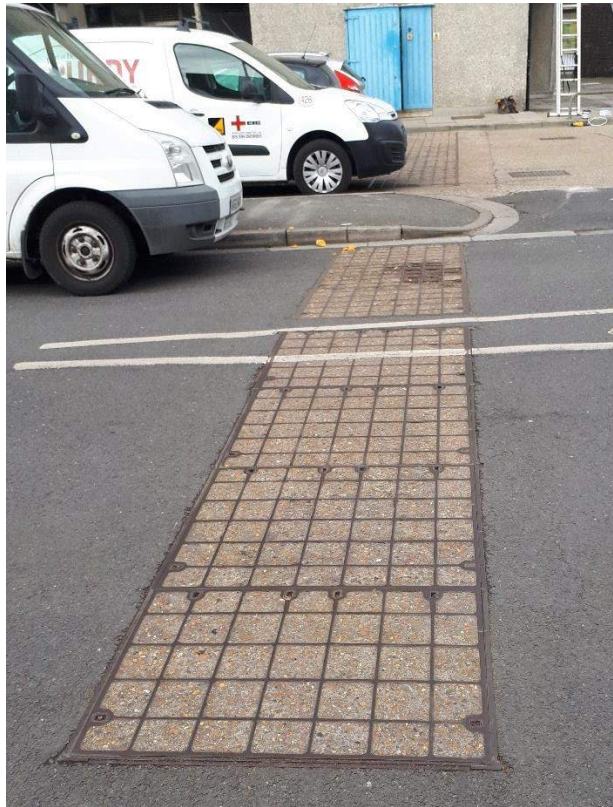


Figure 7: Manhole access points approaching tower plant room



Figure 8: Defunct DH pipework running with car park area

As with all blocks in the area, the Southmere towers were designed with no flats at ground level in order to accommodate communal and plant spaces. The tower ground floor plates currently accommodate the following rooms, all of which were identified from the outside:

- Electrical equipment room.
- Bin store.
- Gas meter (and possibly booster) room.
- Staff toilet.

In addition to defined areas, instances were noted of previous doorways to other unknown ground floor spaces being sealed up, possibly as a result of removal of plant previously associated with incoming DH connections.



Figure 9: Southmere ground floor spaces

Access was possible to the ground floor level of one of the Southmere towers, Osney House. Within the SE corner of the building's footprint, a room was inspected that appeared to be the point at which the previous DH network entered the building, as shown in Figure 10



Figure 10: Capped DH pipework entering Osney House

Also located within this room was the shell of a previous item of DH plant, suspected to be either a DHW storage tank or heat exchanger, shown in Figure 11 .



Figure 11: Previous DH plant

Finally, onward pipework could be seen leaving the room, either running internally to serve Osney House or potentially beyond to distribute to all the Southmere towers.



Figure 12: Disconnected distribution pipework

With the design and layout of all towers believed to be the same, it is likely that each features a now redundant plant room at ground floor level which could potentially be reused as a location for a primary heat substation to serve the buildings.

2.2.1.2 Parkview Towers

Similar to the Southmere site, all existing residential towers on the Parkview Estate were linked to a district heating network at the time of their construction but have since had all flats fitted with individual boilers and according gas supplies installed.



Figure 13: Parkview flats viewed from podium walkway

Unlike Southmere, however, the majority of major distribution pipework involved with the previous heating network were routed above ground, with large extents still visible alongside the estate.



Figure 14: Examples of above-ground defunct DH pipework

Though no access was possible at the time of the visit to ground floor plant rooms and spaces within the Parkview towers, the design and layout are believed to match that of the Southmere towers.

2.2.2 Revision of Energy Consumption Data

Following the visits held to the existing towers to be retained and form part of the developed Thamesmead/Abbey Wood estate, updates were made to the assumptions applied in determining current heat loads for all buildings in recognition of confirmed number of flats and typical floor areas.

Also requested of Peabody were any records of metered gas consumption for all or a representative proportion of the flats/buildings in place.

At the time of reporting, this information had not been collated or provided but could be made available to inform further heat network design development work.

2.3 Revisions to Existing Building Loads

A high-level exercise was undertaken with LBB to test the data previously gathered for existing non-residential Council buildings considered for connection to the network.

This work revealed a number of known changes to buildings, including planned or enacted vacating of these with unconfirmed plans in place to redevelop the sites.

On this basis, it was agreed with LBB that the identified sites would be named within this study but that no loads or modelling of their connection would be included, with further consideration and investigation of this potential to follow at a later stage of the project.

2.4 Updated Demand Assessment Results

Following the findings identified in the preceding sections, the heat demand assessment was updated resulting in a revised total figure of 141 GWh/year for all potential connections at the time of full build out.

The core scheme accounts for 97 GWh/year of this, with Erith adding a further 17 GWh/year as is shown in Figure 15.

HEAT DEMAND DEVELOPMENT

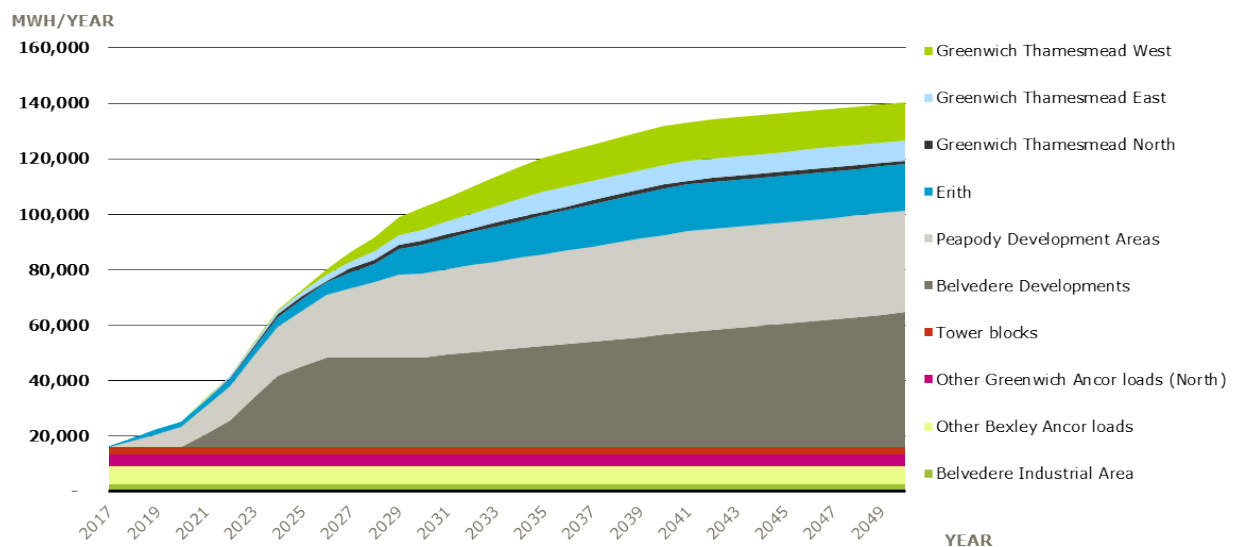


Figure 15: Overall heat demand development WP2

The network routing with scale and timing of all assessed loads for the core network plus the Erith extension is shown in Figure 16, with indications given for radial distance of all identified loads from the Cory EfW plant.

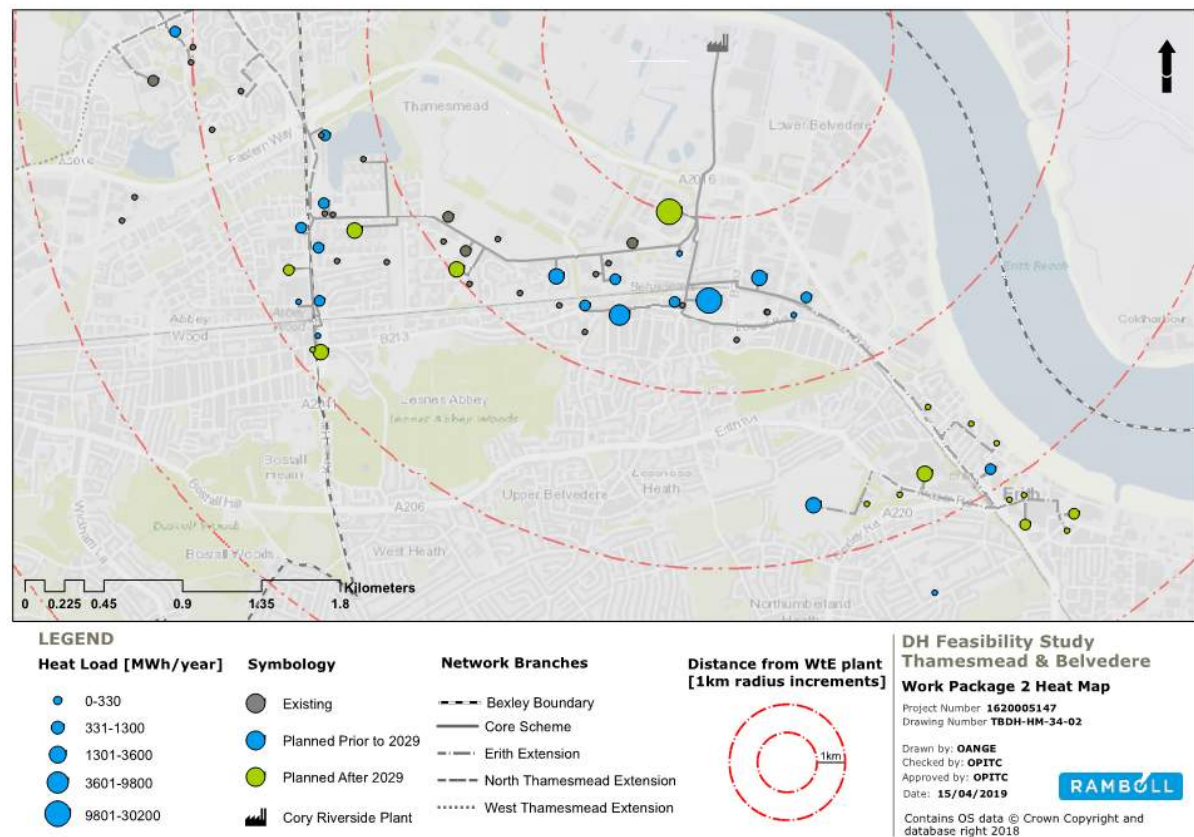


Figure 16: Full assessment area heat map

The opportunity and impact of extending the Core Scheme to incorporate connections and supply to the Erith development area has been further assessed with results provided later within this report.

3. ENERGY SUPPLY ASSESSMENT

SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)

Works during Work Package 1 identified a peak heat offtake capacity available from the Cory EfW plant of 28.6 MW, leading to a maximum annual supply capability of up to 200,000 MWh/year.

This annual capacity was plotted against the extent of assessed heat loads with potential to connect to a new DH network, considering the linear distance of these from the plant, with results as shown in Figure 17.

HEAT DEMAND VS LINEAR DISTANCE FROM EFW PLANT

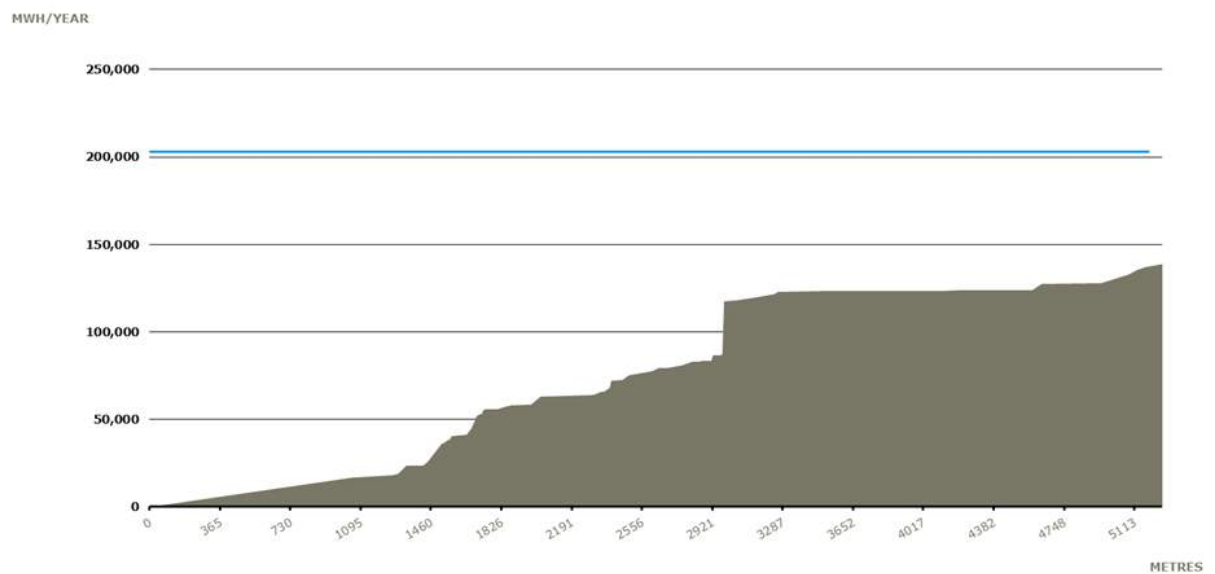


Figure 17: Modelled scheme heat demand by distance from Cory plant

To inform the WP1 high-level assessment of heat supply options, early information was also sought from Cory in terms of key technical and commercial parameters associated with a new heat offtake connection from the existing plant, with those supplied indicated in Table 2.

Table 2: Early plant operation data from Cory

Data Requested of Cory	Data Provided
Current Z-Factor	4.3
Current Electrical Export Prices (£/MWh)	61 in summer
	65 in winter

The following next steps were identified to be undertaken during Work Package 2, to refine and confirm details of heat offtake arrangements from the Cory plant:

- i. Liaising with Cory and their technical advisors on requirements and costs involved with achieving required heat offtake from plant.

- ii. Liaising with Cory and their commercial advisors on methodology and metrics to be applied in derivation of assumed bulk heat purchase pricing.

WORK PACKAGE 2 REFINEMENT

3.1 Cory Engagement

A meeting was held with Cory and their technical & commercial advisors (Fichtner and Inventa respectively) on 22nd February 2019, in order to gain an appreciation for the work already undertaken with regard to plans for facilitating heat offtake from the EfW plant.

3.1.1 Heat Offtake: Technical Arrangements

Works have been undertaken by Fichtner to assess the technical arrangements and spatial requirements to achieve the maximum intended heat offtake capacity from the Cory plant of 28 MWth when operating in combined heat and power (CHP) mode.

Based upon heat provision via 2 no. shell and tube steam to water heat exchangers, with selected capacities of 20 MW and 5 MW respectively, this assessment determined the following spatial arrangements to accommodate plant associated with heat transfer for export from site:

1. Total footprint area of approx. 150m².
2. Split of plant across 3 no. levels (ground & first floor plus roof).
3. Floor-to-floor heights of 4m, to align with existing facility floor levels.

It is proposed that this new plant space be located adjacent to the existing turbine hall, in order to minimise lengths and associated costs of connecting steam and condensate pipework, with an arrangement as shown within Figure 18.

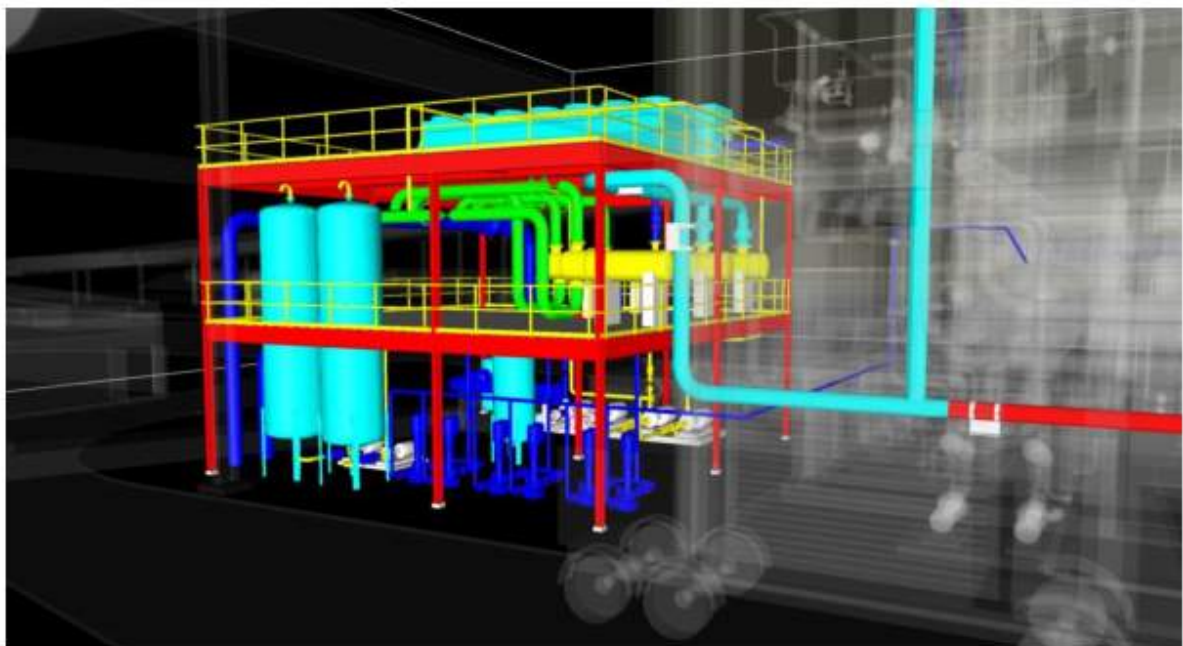


Figure 18: Cory EfW heat exchange plant arrangement (© Fichtner)

Further detail was also shared around operational of the EfW plant and its primary heat generating components as follows:

- Steam turbine undergoes a statutory inspection period of 3 days every 2 years.
- Turbine extended outage for full maintenance occurs every 8 years.
- Boiler plant continues to operate during turbine offline periods, feeding the LP header (from which is it intended steam offtake would occur for heat exchange).
- Annual boiler outages typically comprise 10-12 days (major works) or 5-7 days (minor works) downtime.
- Such outages are staggered to allow continued plant operation.

Reflecting the above, Cory indicated an expected annual availability of 90% for heat offtake from the plant.

3.1.2 Heat Offtake: Commercial Arrangements

The techno-economic analysis undertaken within Work Package 2, and resulting in a proposed heat offtake pricing structure, has reflected a range of updated capital and operating costs discussed and validated with Cory.

Full details of these have been included within sections 5.2 and 5.3 of this report.

3.2 Supplementary Heat Generation & Storage

In recognition of the annual heat availability factor from the Cory plant, it is necessary to provide additional heat generation plant in order to meet the demand of the network throughout the year. The prefeed strategy assumes that the majority of back up plants and thermal stores will be located at the end of distribution network around the new development areas.

This will reduce space requirements and extensive capital investment in the main distribution plant room. Instead, new residential developments will retain satellite energy centres with back up plants and thermal stores, as they connect along the network.

3.2.1 Centralised Heat Generation

It is proposed to provide supplementary heating plant via a mix of centralised and distributed/local gas-fired boilers, with centralised plant comprising the following:

- Total centralised boiler plant of 2.7 MW.

This capacity of plant has been determined not to provide full backup to all buildings connected to the DH network but rather to those which would not feature their own localised boilers, such as existing sites where connections are made via removal of current plant (either for space requirements or due to boilers reaching end of life).

An outline floor area required in which to accommodate this capacity, split between 3 no. boiler modules, has been determined as approx. 300 m² as shown in Figure 19.

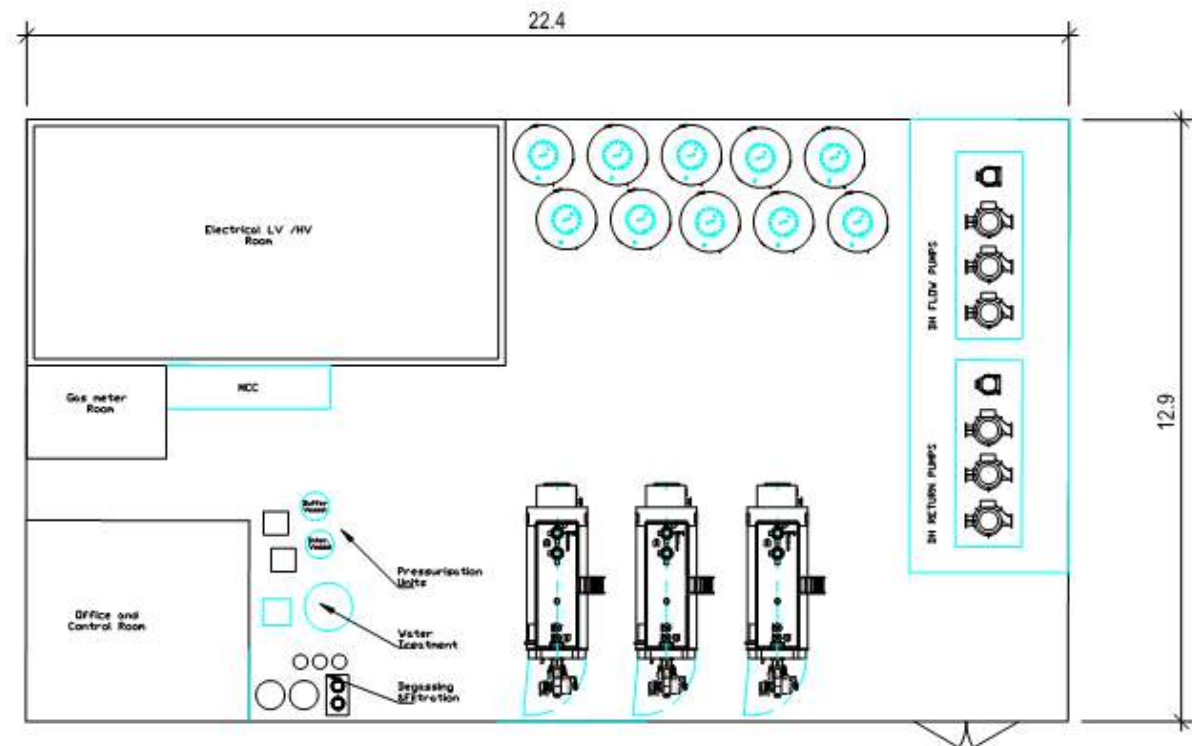


Figure 19: Outline DH network distribution plant/control room layout

In practice, it may be possible (and preferable) to integrate boiler plant within the same area and footprint as the heat exchange arrangement, via introduction of an additional two storeys, based on the current intended 150 m² building footprint.

3.2.2 Heat Storage

The use of heat storage serves to help balance fluctuation between instantaneous heat offtake and consumption within the network, as well as to allow extended offtake during periods of low demand and subsequent increase in supply when demand increases.

Following reassessment and reduction of the number of existing buildings and loads to be served by the DH network, the provision of centralised thermal storage during initial buildout of the scheme is not deemed necessary, with balancing of heat supply to be managed via control interfaces between the DH distribution and Cory plant. However, an investment on 15m³ of thermal store is included in the cashflow for contingency purposes.

Centralised thermal store is not included in the layout of Figure 19 but, if necessary, this could be located externally adjacent to the facility. Instead, the bulk of storage used to balance heat supply and demand is proposed to be provided via thermal stores installed in the satellite energy centres.

The current investigation concluded to 2.7 MW peak of standalone heat demand, which is less than 10% of Cory's heat offtake capacity. If extended standalone heat loads connect, central thermal store options should be considered.

3.2.3 Distributed Heat Generation

In addition to the proposed inclusion of limited centralised supplementary heating plant, the presence and use of discrete distributed plant in the form of boiler.

When allocating costs for supplementary distributed boiler plant, costs breakdown for boiler plantrooms of similar capacity from previous projects were referenced.

Within subsequent techno-economic modelling, it was assumed that this associated boiler CAPEX sits with each site developer, meaning that this represents a proportion of their avoided cost in installing plant of sufficient capacity to serve the full peak load of their site.

The peak demand figures determined at full build-out for each main site developments are illustrated in Figure 20.

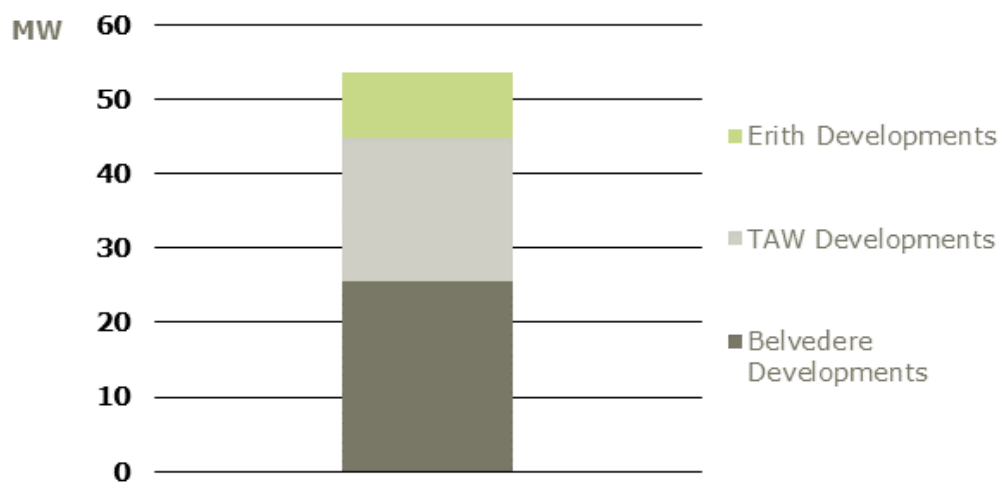


Figure 20: Peak heat demand for new development (at full build-out)

3.2.3.1 Distributed Heat Storage

The selection of distributed storage volumes has been based on the capacity to store heat associated with 30 minutes of peak demand of each discrete development. This capacity is determined based on a high-level energy model indicating an EfW share of heat fluctuating between 90%-97%.

This size of thermal storing is comparable with the counterfactual case of decentralised low carbon heat plant with adequate thermal store cylinders.

4. ENERGY DISTRIBUTION SYSTEMS

SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)

Works during Work Package 1 identified the proposed sequence of plant and infrastructure envisaged to form the entirety of the heat network arrangement, from initial heat offtake within the Cory plant through to individual dwelling/building systems, as shown in Figure 21.

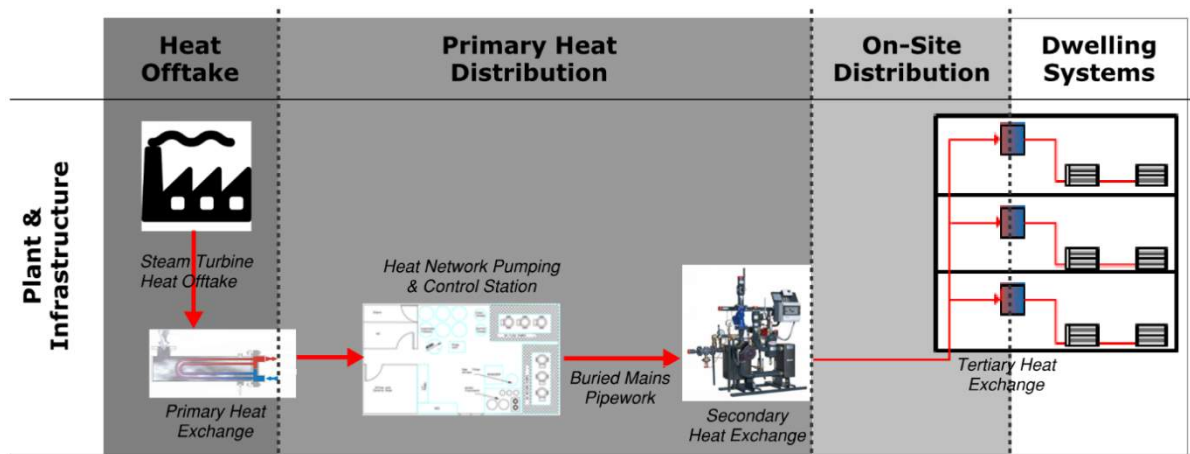


Figure 21: Plant & infrastructure elements comprising heat network

Also determined and quantified was a proposed route and pipework split to comprise the "Core Scheme" DH network, linking the Cory plant to intended connecting loads, as described within Figure 22 and Table 3.

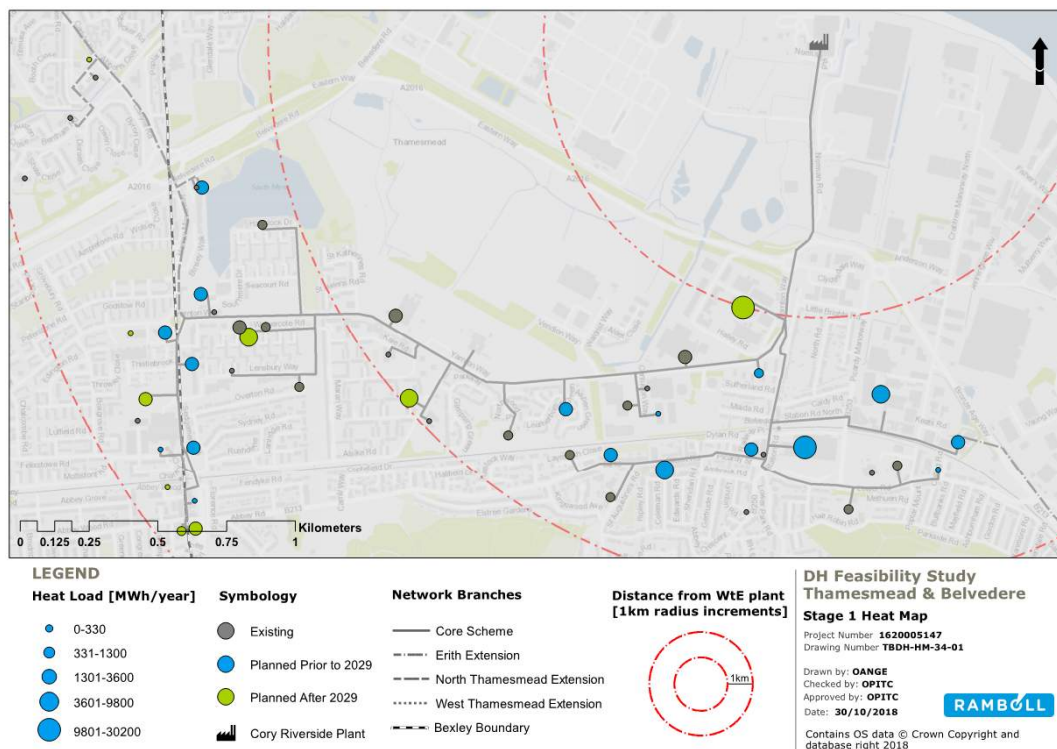


Figure 22: Core scheme heat network route

Table 3: Breakdown of heat network pipe lengths

	Main Spine (m)	Branches (m)	Total length (m)
Core Scheme	3,960	7,112	11,072
Erith extension	1,617	1,169	2,786
North Thamesmead extension	2,052	1,484	3,536
West Thamesmead extension	2,143	2,140	4,066

The following next steps were identified to be undertaken during Work Package 2, to refine and develop further detail in relation to heat distribution infrastructure:

- i. Information to be gathered on existing major buried infrastructure present within roads and areas proposed for heat network routing.
- ii. Assessment of alternative primary heat network main routing, adjacent to Crossness Nature Reserve.
- iii. Completion of detailed hydraulic and heat loss assessment of proposed heat network routing.
- iv. Assessment to be undertaken to determine thermal store sizing options.
- v. Options for network pumping station and thermal store locations to be assessed with Cory.
- vi. Details of existing heating systems (or though planned following refurbishment) to be sought for major retained buildings considered for heat network connection.
- vii. Acceptability of direct dwelling/building connections from bulk heat substations to be tested with site developer stakeholders.

WORK PACKAGE 2 REFINEMENT

4.1 Existing Buried Infrastructure

In order to assess further the viability of the new DH network between the Cory plant and the intended connecting buildings and sites, a third part company ("Groundwise") were employed to undertake a search of all existing utilities and other buried services across the extent of the proposed route.

In keeping with the route determined during WP1 for the Core Scheme, the outline of the services search area is shown in Figure 23.



Figure 23: Extent of buried services search area

4.1.1 Utilities and Network Operators

Table 4 indicates the full list of utility and other network owners/operators who were approached for details of existing services and identifies those who have assets in the area.

Table 4: List of all utility & network operators contacted

Type	Data Supplier
Electricity	Energetics
Electricity	UK Power Networks
Electricity	Utility Assets Ltd
Electricity	National Grid
Gas	GTC
Gas	Southern Gas Networks
Mobile Phone Masts	Mast Data
Telecom	BskyB Telecommunications Services Ltd
Telecom	BT
Telecom	C.A. Telecom - Colt
Telecom	CityFibre
Telecom	euNetworks
Telecom	Instalcom Ltd
Telecom	GTT (Formerly Interoute Vtesse Networks Ltd)
Telecom	KPN
Telecom	MBNL
Telecom	Plancast
Telecom	Telent
Telecom	Trafficmaster
Telecom	Verizon
Telecom	Virgin Media
Telecom	Vodafone
Transport	Crossrail
Transport	HS1 / HS2
Transport	London Overground
Transport	London Underground HV Power Assets
Transport	London Underground
Transport	LUL TFL Streetworks
Transport	Network Rail
Transport	Transport for London
Tunnels	MOD
Tunnels	Thames Tideway Tunnel
Various	HSE <i>[client should contact HSE directly for further information]</i>
Various	LinesearchbeforeUdig – ESP
Various	SSE
Mains	Thames Water
Sewers	Thames Water
District Energy	ENGIE
Various	Local Council **

The maps received indicating services within and adjacent to the intended route for new DH pipework were reviewed and, with the key risks identified comprising the presence of high voltage cables, extra high voltage cables and gas pipework within Norman Road, running toward the Cory plant.

The resulting changes required to network routing were minor and limited to lateral shifts of pipe location in order to maximise distance from existing services running directly parallel. It was not necessary to divert or otherwise alter the basic intended routing for the network.

With the combined total of drawings and information provided exceeding 1,600 pages (across some 600+MB), the full Groundwise report and appendices will be issued to LBB as a separate accompanying document to this report.

It is recommended that, as designs for the DH network progress, the Groundwise report is referenced and used identify specific parties within whom early discussions should be sought in order to:

- a) Confirm that services information remains up-to-date and valid.
- b) Confirm accuracy offered for services line and levels.
- c) Understand specific requirements around permissible proximity of other services.
- d) Make any arrangements required for trial-holing or other investigations.

4.2 Primary Heat Network Routing

4.2.1 Route Assessment

Depending upon the diameter and material of pipework involved, the costs of civil trenching and reinstatement works associated with installation of DH networks can be equal or even exceed those of the pipes themselves. This is especially true when installing within hard-dig areas requiring the breaking out of existing road or pavement surfaces.

For this reason, it is generally preferable to pursue a route for new DH pipework which utilises soft-dig area characterised by unmade ground.

The Core Scheme network route was derived during WP1 with the priority of minimising the distance travelled by primary transmission pipes between the largest load centres, as well as avoiding the need to cross major obstacles (either natural or manmade).

The result of this was a route which utilises a combination of Norman Road and Yarnton way to travel from the Cory plant to the Bexley area and beyond to the Thamesmead/Abbey Wood area respectively.

In practice, it may be possible to minimise the hard-dig elements involved with the Norman Road element of the route via the laying of pipes within grass verges to one (or both) sides of the road itself.

A visit was undertaken to the Abbey Wood area on 18th February 2019 in order to walk the intended route of primary network pipework, from Thamesmead/Abbey Wood to Belvedere.

During this route walk, ongoing enabling works were seen associated with Phase 1 of Peabody's redevelopment works on the Southmere Village and Binsey Walk sites (north of Yarnton Way). These works should serve to provide greater clarity of the existing buried services in the area.



Figure 24: Ongoing enabling works within Yarnton Way (east of A2041 roundabout)

Also clearly visible alongside Yarnton Way, adjacent to the Parkview Estate, were large sections of the previous (no defunct) district heating pipes which once serves the residential towers in this area.



Figure 25: Example of above-ground DH pipework, mounted on side of Parkview Estate podium walkway

Though not as common in the UK, such an approach to above-ground pipework distribution is seen in cities elsewhere in the world and can serve as a viable option should it offer significant savings in pipe length, for example if significant buried obstructions are identified.

Heading east along Yarnton Way, beyond the Parkview Estate, options were identified for potential use of soft dig and verge spaces alongside the road towards Belvedere, in order to reduce costs of installation.



Figure 26: Yarnton Way (east of Alsike Road roundabout)

A critical and likely most challenging part of the proposed network link to the redevelopment areas in and around Belvedere is the requirement to cross the railway line in the vicinity for the station.

Whilst only 2 tracks wide, the only existing crossing point is a pedestrian footbridge, as pictured in Figure 27.



Figure 27: Pedestrian footbridge at Belvedere station

It is felt unlikely that this lightweight steel bridge and decking could support the addition of new DH pipework. For this reason, CAPEX allowance has been made within the techno-economic modelling for the network for the introduction of a new crossing, either comprising a dedicated pipework bridge or micro-tunnelling under the lines.

An alternative approach would be to increase pipework length and network distance via the routing of pipework to the existing B253 road bridge of the railway, approx. 300m east of Belvedere station.



Figure 28: Belvedere area railway crossing options

4.2.2 Alternative Primary Route Options

A significant extent of green space exists between the Cory plant and Thamesmead, comprised mainly of the Crossness Nature Reserve and the Erith Marshes as shown in Figure 29.



Figure 29: Green space and primary roadways between Cory and Thamesmead

With the nature reserve sitting adjacent to the Thames Water WWTW site, it is understood that an existing easement corridor exists just within the edge of Thames Water's land in which HV cabling connecting from the Cory plant currently runs.

Beyond here, the dual carriageway comprising Eastern Way separates land to the north from Erith Marshes then Southmere Park further south.

Whilst an opportunity may exist for a pipework route to utilise some or all of the soft-dig options present between Cory and Thamesmead, the following further investigation would be required in order to test and confirm this potential:

- Determine acceptability of running DH pipework in parallel with HV cabling in existing easement corridor.
- Confirm rights of access to install pipework within Crossness Nature Reserve.
- Consider crossing option for Eastern Way (either bridging over or micro-tunnelling under).
- Understand permissibility of routing through Erith Marshes, plus assess outline ground conditions with a view to stability, depth and ground-water.

In addition, such routing would need to consider how and where to run a major transmission branch toward the Belvedere area.

At the current feasibility stage, it was determined to be a lower risk (and more readily quantifiable) option to propose a route following existing roadways, less major than Eastern Way, and to respect presence and extents of existing services therein.

4.3 Network Hydraulic Modelling

With network routing refined Ramboll's in-house hydraulic modelling software System Rønet, developed over 30 years' experience in Danish heat network design and operation, was used to

develop an overall network operating strategy and to calculate the required pipe sizes for the proposed heat network route.

The key inputs to this modelling work were:

- Pipe lengths
- Topography along route
- Network operating temperatures
- Network operating pressure
- Peak load conditions

Table 5 presents the assumptions regarding network temperatures. In designing a district heating network, it is common practice to maximise the temperature differential (ΔT) between the flow and return system as the greater the ΔT , the smaller the pipes can be and therefore the lower the capital cost.

Table 5: Heat Network Temperature Design Parameters

Design Parameter	Value	Comment
Existing buildings – Secondary side – Flow and return	80/60°C	Refer to CP1
New buildings – Secondary side – Flow and return	65/35°C	Refer to CP1
Difference between primary return temperature and the secondary return temperature	5°C	Across heat exchanger
Primary flow temperature at design condition	105°C	At maximum capacity requirements, the operational will aim at 85°C, especially until all the loads are connected.
Primary return temperature range for new developments at design condition	40-55°C	Assumes design return temperature that can be achieved
Primary return temperature range for existing buildings at design condition	55-65°C	Assuming design return temperature that can be achieved from an existing building with retrofitting and rebalancing of existing systems when required.

The network flow temperature was calculated from the exhaust heat capacity information supplied by Cory, while the temperatures of the secondary side of the buildings are unknown at this stage so were assumed to be in line with those indicated/recommended within the CIBSE Heat Networks Code of Practice for the UK (CP1).

CP1 guidance for existing buildings at a feasibility stage advises that existing radiator circuits designed for 82°C flow and 71°C return can be rebalanced to achieve lower return temperatures (such as 80°C flow and 60°C return), as radiators are often oversized, especially where fabric improvements have been made subsequently to the original heating installation.

For the hydraulic modelling, a flow-return temperature differential (ΔT) of 50°C was assumed (105-55°C) for the primary transmission pipes to ensure minimising of cost whilst also providing future proofing of capacity.

As specified in WP1, this way the network has the flexibility to operate at lower temperatures (85/55), as will likely be required by the mix of existing and new-build loads intended to connect, until full build-out occurs whilst still providing adequate capacity to meet future peak load conditions.

A nominal pipe diameter of DN300 has been determined as a trade-off between oversizing and associated increased investment and futureproofing of network spine capacity. For the majority of the year, a network operating at 85/55 °C can supply the full EfW heat capacity.

The associated large volume flow rates involved, however, impose a maximum velocity of 3.3 m/s within the network. It is therefore recommended that in winter peak conditions (or following future extensions) the DN300 spine should be designed to operate at 105/55 °C, thereby allowing transmittance of up to 42 MW.

An oversized spine of DN300 has been allowed for those highlighted in blue within the Core Scheme, being the branches leading to the Erith extension, in order to guarantee capacity for future connection.

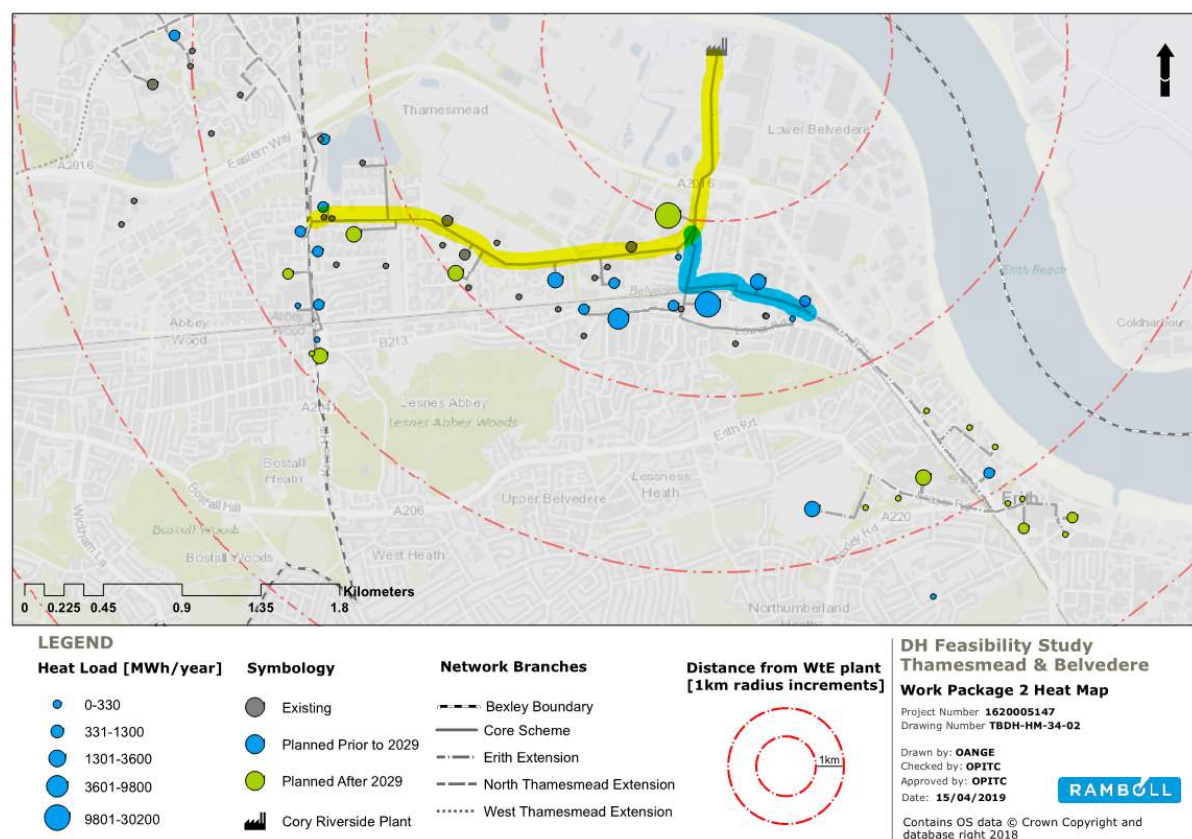


Figure 30: Core Scheme network with main transmission (yellow) and Erith extension (blue) highlighted

4.3.1 Heat Losses

The heat losses of the network were modelled using a proprietary software produced by one of the largest DH pipework suppliers, Logstor¹, considering 3 no. flow and return temperature differential as indicated in Table 6.

Insulation at series 2 thickness and steel material were selected and modelled.

¹ <http://calc.logstor.com/en/energitab>

Table 6: Heat Loss cases

Pipe size Nominal diameter (mm)	Heat Loss 1	Heat Loss 2	Heat Loss 3
	105-55 for 90 days of year, 85-55 for rest) MWh/year/m	105-55 for 245 days of year, 85-55 for rest) MWh/year/m	(85-55 for all year) MWh/year/m
25	0.13	0.14	0.12
32	0.14	0.14	0.13
40	0.15	0.17	0.15
50	0.18	0.18	0.17
65	0.19	0.21	0.19
80	0.21	0.23	0.2
100	0.22	0.23	0.21
125	0.25	0.26	0.23
150	0.28	0.3	0.27
200	0.32	0.34	0.3
250	0.32	0.33	0.3
300	0.36	0.38	0.34

Heat Loss case 2 was selected and modelled in the financial analysis with a 20% safety margin.

4.3.2 Network Layouts

The pipe layouts and schedules derived for the Core Scheme, plus inclusion of the Erith extension, have been provided in this section.

4.3.2.1 Core Scheme

The pipe schedule for the Core Scheme is shown in Table 7, with Figure 31 showing the related network layout generated by System Rørnet.

Table 7: Core Scheme cluster pipe schedule

Pipe Diameter (mm nominal bore)	Total pipe length (m)
25	722
32	55
40	185
50	104
65	906
80	359
100	402
125	1,362
150	84
200	1,240
250	837

Pipe Diameter (mm nominal bore)	Total pipe length (m)
300	3,252
Total	9,507

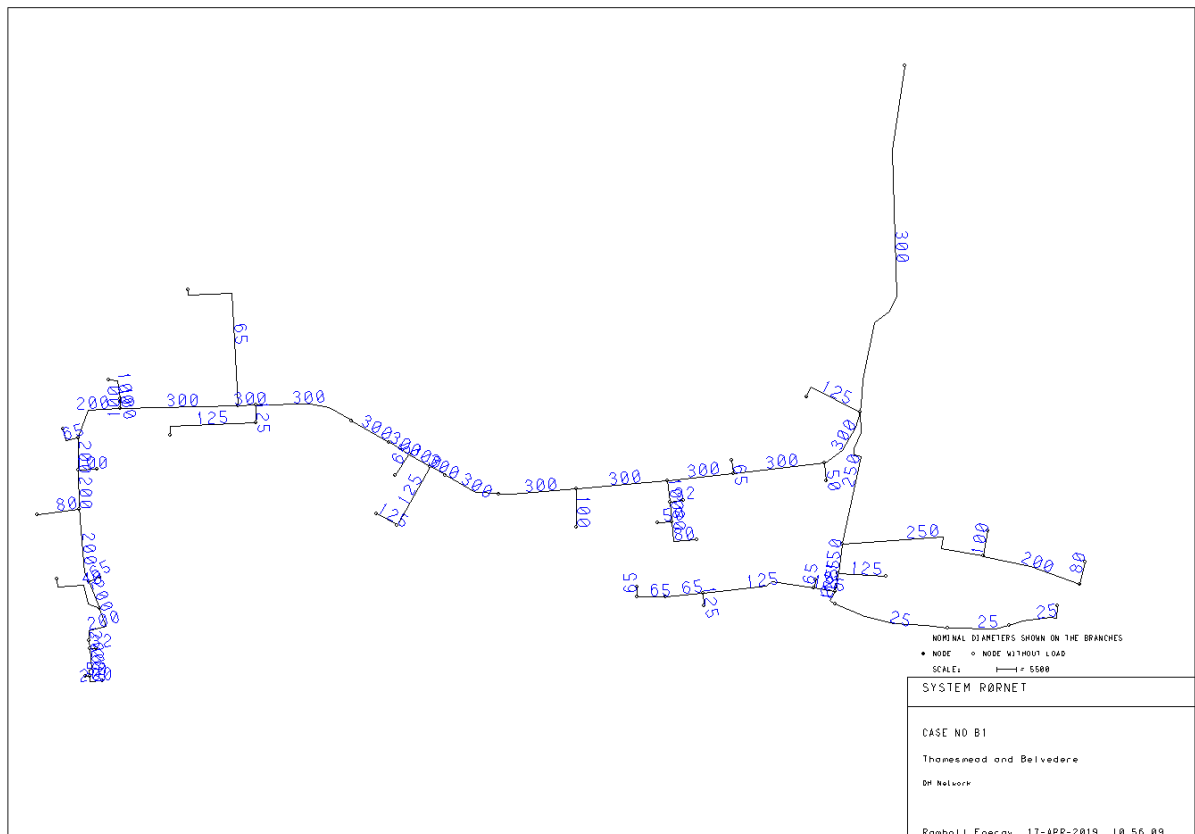


Figure 31: Core Scheme SR layout output

4.3.2.2 Core & Erith

The pipe schedule for the Core Scheme plus Erith extension is shown in Table 8, with Figure 32 showing the related network layout as generated by System Rørnet.

Table 8: Core & Erith cluster pipe schedule

Pipe Diameter (mm nominal bore)	Total pipe length (m)
25	772
32	140
40	323
50	1,062
65	811
80	605

Pipe Diameter (mm nominal bore)	Total pipe length (m)
100	1,514
125	1,362
150	874
200	2,925
250	-
300	3,649
Total	14,037

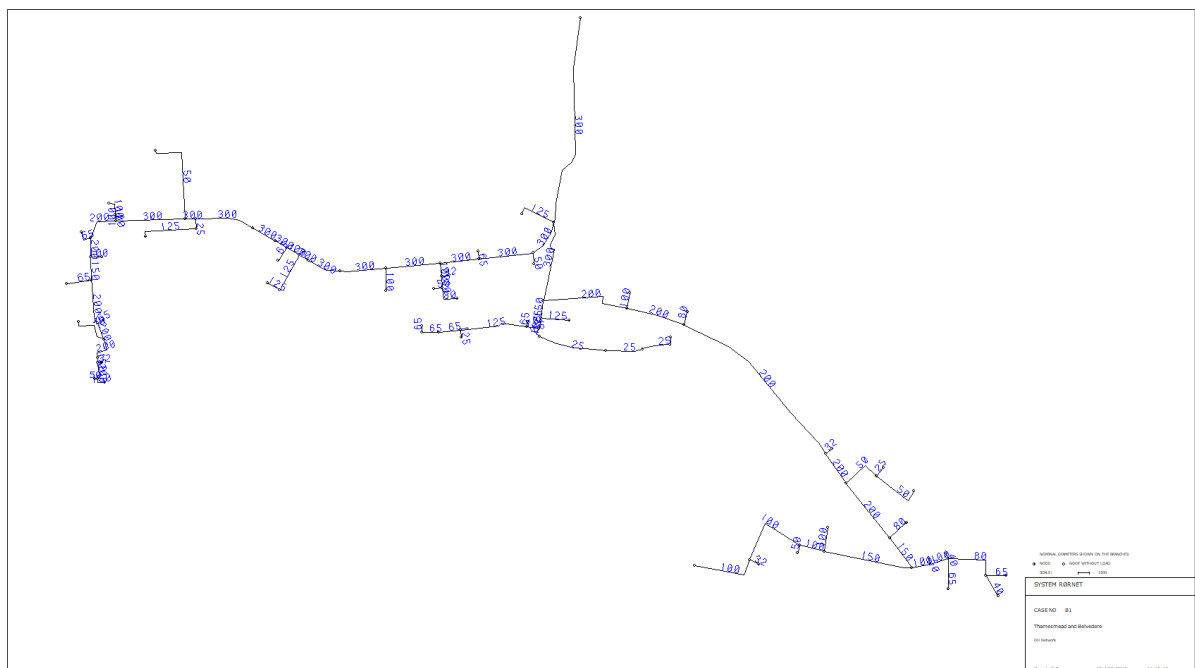


Figure 32: Core Scheme & Erith extension SR layout output

4.4 Existing Buildings to Connect

The largest single existing buildings and loads proposed for connection to the DH network comprise the retained Southmere and Parkview Towers. As is detailed earlier within section 2.2, these buildings have been identified as having their original communal heating systems replaced with gas supplies to individual boilers.

4.4.1 Previous Incoming DH Services

Spaces still exist at ground floor level within the buildings visited (and are suspected to be present in all) where previous DH pipework entered, and associated plant was located for subsequent distribution within the towers.

Though likely requiring some intrusive works, a next step in determining potential routing for new internal would include access to the previous risers used by DH pipework.

4.5 Development Connection Arrangements

In keeping with the approach identified during Work Package, it is proposed that an initial point of hydraulic separation be provided between the incoming transmission pipework and the subsequent distribution network on discrete developments via use of a heat exchanger located in the premises of residential developments plantrooms.

For new residentially-led developments, further hydraulic separation would be introduced via the use of heat interface units (HIUs) within or local to individual flats/properties.

5. TECHNO-ECONOMIC ASSESSMENT

SUMMARY OF WORK PACKAGE 1 FINDINGS (for full details, refer to WP1 report)

As part of the initial economic assessment completed as part of Work Package 1, the anticipated roles and interactions between main parties involved with the design, delivery and ultimate operation of the scheme were defined, as shown in Figure 33 (with the previously named "Pipe Co." now termed "Network Operator" for clarity).

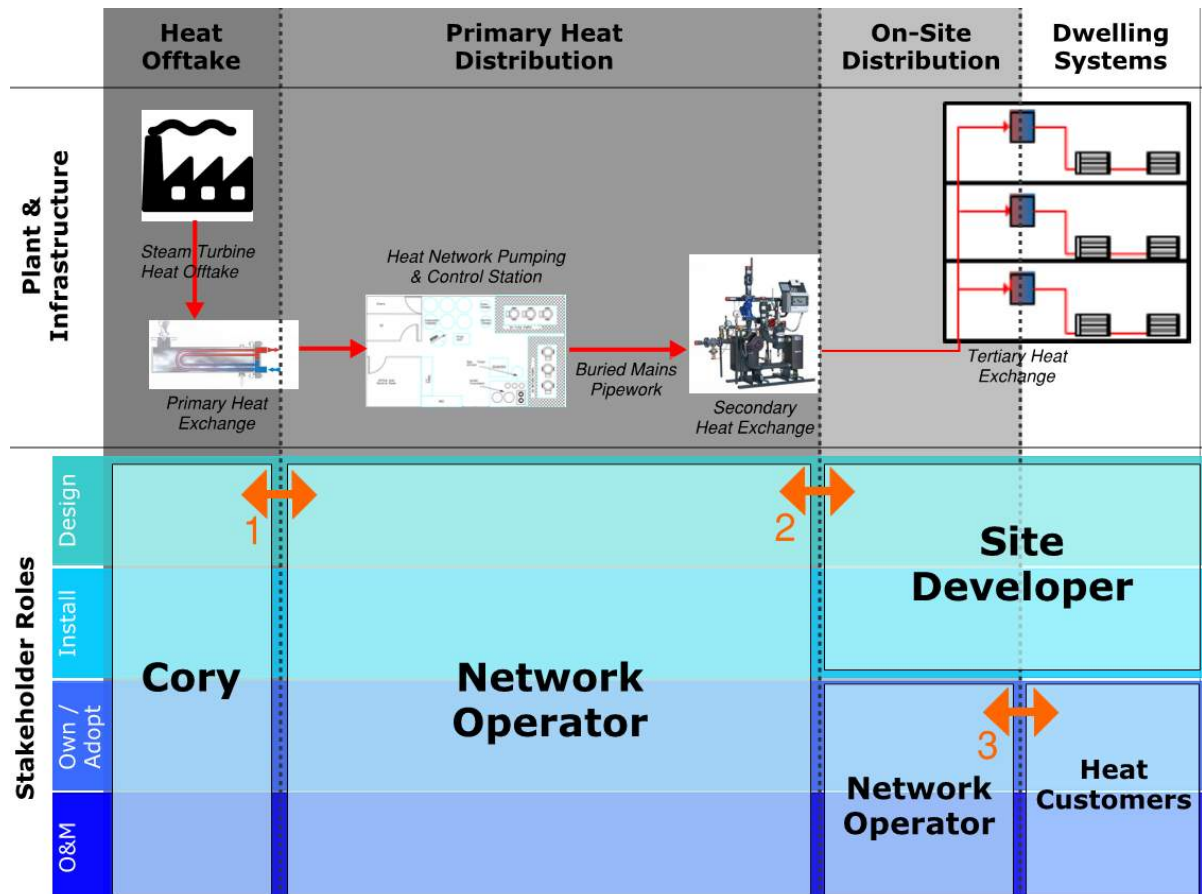
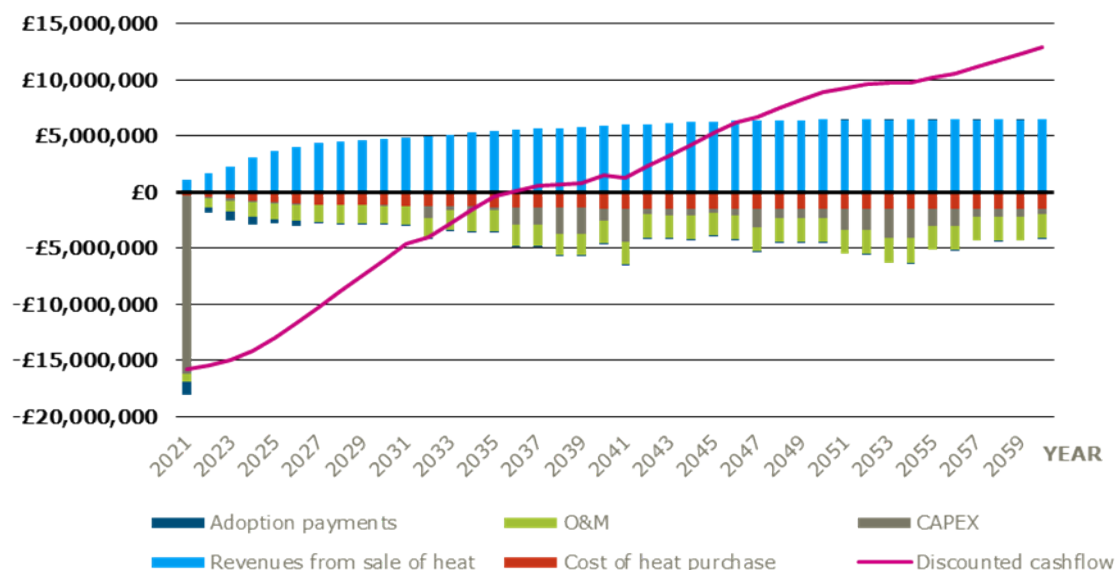


Figure 33: Heat network stakeholder role delineation

Key economic performance indicators were derived for the identified Core Scheme option, as displayed in Table 9 and Figure 34.

Table 9: Core Scheme economic performance indicators

Core Scheme (Belvedere plus Thamesmead & Abbey Wood)			
years:	25	30	40
IRR	4.5%	6%	8%
NPV	£1,440,000	5,070,000	£12,530,000

PROJECT CASHFLOW**Figure 34: Core scheme cashflow**

Finally, to further test the economic performance of the proposed Core scheme network, a series of sensitivity analyses were undertaken in respect of selected key variables, as shown in Table 10.

Table 10: Results of sensitivity analysis on Core Scheme

IRR	Project Period	-20%	-10%	0%	10%	20%
DH Network CAPEX	25	7.2%	5.8%	4.5%	3.4%	2.4%
	40	9.8%	8.7%	7.8%	7.0%	6.3%
Heat Offtake Price	25	6.4%	5.5%	4.5%	3.5%	2.4%
	40	9.2%	8.5%	7.8%	7.1%	6.3%
Heat Sale Price (Residential)	25	-20.7%	2.5%	4.5%	6.3%	10.7%
	40	0.3%	6.4%	7.8%	9.1%	12.6%
Heat Sale Price (non-Residential)	25	3.6%	4.1%	4.5%	5.0%	5.4%
	40	7.2%	7.5%	7.8%	8.1%	8.4%
Connected Heat Loads	25	1.6%	3.1%	4.5%	5.8%	7.0%
	40	5.7%	6.8%	7.8%	8.8%	9.6%
Cost of Financing/Borrowing	25	4.7%	4.6%	4.5%	4.5%	4.4%
	40	7.9%	7.9%	7.8%	7.8%	7.7%

The following next steps were identified to be undertaken during Work Package 2, to refine the business case modelling undertaken:

- Reflection of refined heat network modelling and sizing work in revised CAPEX allowance.
- Inclusion of revised costs involved with achieving required heat offtake from Cory plant.
- Incorporation of refined methodology and metrics applied in derivation of assumed bulk heat purchase pricing.

- iv. Reflection of cost impacts from identified existing buried services and related impacts upon network routing.
- v. Application of further load sensitivity testing to reflect identified variances to potential future connecting heat loads.
- vi. Identification of potential sources for project capital funding.
- vii. Refinement of counterfactual case for heat provision to inform carbon savings calculations.

WORK PACKAGE 2 REFINEMENT

5.1 Network CAPEX Refinement for Pipe Sizes

Following the undertaking of hydraulic modelling, to refine network sizing, previously compiled CAPEX figures were revisited and updated.

5.2 Refined Heat Offtake Facilitation Costs

Following consultation with Cory and their commercial advisors, the costs applied for the necessary heat offtake arrangement has been revised.

Whilst an initial estimate of £1m was made and applied during WP1, Cory and their advisors have used the early concept design developed for all associated plant, including provision of new structure to support and house it, to arrive at a cost of £2.534m.

This investment CAPEX, plus Cory's associated expenses including cost of capital and margins, have been applied within the refined tariff structure as per Cory/ Inventa recommendations.

5.3 Refined Heat Offtake Tariff Structure

Whereas the heat offtake charge determined during WP1 considered a single tariff, on a per kWh exported basis, the refined WP2 modelling considered a tariff broken down into variable and fixed/standing charges. This is to disassociate heat tariffs from heat demand estimations, thereby de-risking the heat offtake agreement.

The annual standing charges were determined using a discrete cashflow model, generated in recognition of Cory's projected initial CAPEX investment in the heat offtake plant (including related cost of capital) plus the related annual O&M costs.

Both of these were provided direct by Cory, to ensure their validity and acceptability, and led to the determining of a standing charge of £276,647 per year to break even including a 12% margin.

Table 7 displays the key metrics applied and derived from this approach, including the resulting fixed and variable cost paid to Cory for the heat offtake.

Table 11: Heat Offtake price calculator

<i>Variable charge</i>		<i>Standing charge</i>	
Z factor (1 MWh of el to X of heat)	4.3	Discount factor	6%

Variable charge		Standing charge	
Exported electricity price (£/MWh)	63	Charge (£/year)	247,006
Margin	12%	Margin	12%
Cost of heat (£/MWh)	16.4	Cost of heat (£/MWh)	276,647

5.4 Network CAPEX Refinement for Pipe Routing

All minor changes made to intended pipe routing, as a result of the route walk and information gathered on existing buried services, have been reflected within updated costs for the Core Scheme network.

A breakdown of the total cost (by pipe size) is shown in Table 8 while the length can be found in the hydraulic analysis (Section 4.3.2).

Table 12: DHN pipe CAPEX

Pipe size Nominal bore (mm)	Total Cost (£) Core Scheme	Total Cost (£) Core & Erith Scheme
25	£380,622	£407,248
32	£31,520	£79,886
40	£113,278	£197,441
50	£66,002	£677,429
65	£625,028	£559,290
80	£270,682	£455,783
100	£350,677	£1,321,763
125	£1,333,856	£1,333,856
150	£92,672	£960,577
200	£1,526,618	£3,602,547
250	£1,154,044	£0
300	£4,648,695	£5,216,969
Total	£10,593,693	£14,812,788

5.5 Sources for Capital Funding

The most likely source for capital funding, in support of all or part of the proposed DH network, is the Government's Heat Networks Investment Programme (HNIP).

5.5.1 Heat Networks Investment Programme

HNIP is a Government scheme offering partial capital funding for the delivery of heat network projects capable of achieving significant annual cost and carbon savings but which, without support, could not achieve the delivery body's required commercial hurdle rates for investment.

Even if a large network, once fully built out, can demonstrate an acceptable return on investment it is likely that the costs involved with installation and operation of initial elements may not perform as well.

In order to avoid the downsizing of key elements to save on initial CAPEX, which could reduce or remove elements of future-proofing for latter network expansion, funding could be sought through HNIP to retain the strategic forward plan for the project.

5.6 Refinement of Heat Sale Tariffs

As part of developing a new techno-economic model for the Core Scheme network, considerably more granularity and detail was considered in developing heat sale tariffs. This section describes the logic behind this reworking and the results it produced.

Similar to the refinement made to derivation of the Cory heat offtake tariff, the heat purchase prices for connected customers has been developed to comprise variable and fixed components, comprising a per kWh tariff linked to consumption and an annual standing charge.

This model, as before in WP1, assumes an adoption of the secondary distribution infrastructure installed on development sites to deliver heat to individual consumer HIUs/plate heat exchangers.

5.6.1 Residential Heat Tariff

A heat price comparator calculation has been used to determine a residential heat sale price offering a 10% saving, when compared against the marginal cost of heat produced by an alternative gas boiler arrangement. This utilised data on typical domestic gas charges of major utility companies operating in the Bexley area.

The details of this price comparator are provided in Table 13.

Table 13: Heat Price comparator for Residential customers

Component	Unit	Value
Heat Sales	kWh/year	4,000
Cost of gas	£/kWh	0.0404
Gas boiler eff.	-	90%
Cost of fuel	£/year	179
Gas standing charge	£/year	92
Boiler maintenance	£/year	100
Boiler replacement	£	2,000
Boiler lifetime	years	15
Boiler sinking fund	£/year	133

Component	Unit	Value
Counter factual standing charge	<i>£/year</i>	325
Counterfactual variable charge	<i>£/year</i>	179
Counterfactual cost of heat	<i>£/year</i>	505
DH discount	%	10%
DH cost of heat	<i>£/year</i>	454
DH heat cost of heat	<i>£/MWh</i>	113.5
DH standing charge	<i>£/year</i>	293
DH variable charge	<i>p/kWh</i>	4.04

5.6.2 Non-Residential Heat Tariff

A similar methodology has been applied in using a separate price comparator calculation to determine a heat sale tariff for non-residential customers, as displayed in Table 14.

Table 14: Heat Price comparator for non-Residential customers

Component	Unit	Value
Heat Sales	<i>kWh/year</i>	300,000
Connection Capacity	<i>kW</i>	239
Cost of gas	<i>£/kWh</i>	0.0279
Gas boiler eff.	-	90%
Cost of fuel	<i>£/year</i>	9,300
Gas standing charge	<i>£/year</i>	92
Boiler maintenance	<i>£/year</i>	1,013
Boiler replacement	<i>£</i>	67,500
Boiler lifetime	<i>years</i>	15
Boiler sinking fund	<i>£/year</i>	4,500
Counter factual standing charge	<i>£/year</i>	5,604

Component	Unit	Value
Counterfactual variable charge	£/year	9,300
Counterfactual cost of heat	£/year	14,904
DH discount	%	10%
DH cost of heat	£/year	13,414
DH heat cost of heat	£/MWh	44.7
DH standing charge	£/kW capacity	21.1
DH variable charge	p/kWh	2.79

5.7 Techno-Economic Modelling Results

5.7.1 Refined CAPEX & OPEX

All cost components used within the refined WP2 techno-economic analysis are displayed in Table 15, comprising capital, operating and replacement costs, with a borrowing cost factor of 4.5% assigned against all CAPEX figures.

It should be noted that some parameters requiring details not available at the time of writing, such as secondary network lengths allowing the calculation of associated OPEX elements, were not included in the financial modelling undertaken.

Furthermore, CAPEX phasing has been included for in the network modelling to reflect the impact of phased load connectivity.

Table 15: Cost Components considered

	CAPEX Component	OPEX Component	REPEX Component
Energy Centre	Boiler Costs	Energy Centre	Gas Boiler
	DHN Pump CAPEX	Boiler	Pumping
	Thermal Store CAPEX	Water Treatment	
	Pressurisation /expansion specific CAPEX	Thermal Store	
	Water treatment capex		
	Mechanical fit out capex		
	EC wiring costs capex		
	ICA & Scada capex		
	Utilities capex		
	Metering Cost		

	CAPEX Component	OPEX Component	REPEX Component
	EC building costs Ventilation costs Planning support (air quality, noise, transport) Builders work in connection Testing and commissioning Consultancy fees Design costs Contractors costs Contingency Prelims		
Network	DHN CAPEX	Fixed Network Cost	DH Network
	DHN Testing and commissioning	Variable Network Cost	Plant Room
	DHN Consultancy fees	Plant Room	DH Substation
	DHN Design costs	Connection	HIU
	DHN Contractors costs		
	DHN Client's PM and legal costs		
	DHN Contingency		
	DHN Prelims		
	DHN Consultancy fees		
	DHN Design costs		
	DHN Contractors costs		

Table 16 and Table 18 summarise the overall capital, operating and replacement costs specific to the two modelled scenarios, comprising the Core Scheme and the addition of the Erith extension.

Table 16: Summary of CAPEX for scenarios modelled

CAPEX ITEM	Core Scheme	Core & Erith
Energy Centre & central plant (£m)	2.86	3.52
Energy Distribution Systems (£m)	15.31	21.35
TOTAL CAPEX (£m)	18.18	24.87

Table 17: Network CAPEX Phasing

Scenario	Year 0	Year 1	Year 2	Year 3	Year 4	Year 5
----------	--------	--------	--------	--------	--------	--------

Core Scheme	61%	12%	12%	5%	5%	5%
Core & Erith	57%	14%	14%	5%	5%	5%

Table 18: OPEX and REPEX summary per scenario

ITEM	Core Scheme	Core & Erith
TOTAL DISCOUNTED OPEX over 40 years (£m)	26.21	32.75
TOTAL DICOUNTED REPEX over 40 years (£m)	13.67	16.07

5.7.2 IRR and NPVs

Key economic performance indicators derived for the two modelled network scenarios are shown in Table 19, comprising ranges of internal rate of return (IRR) and net present value (NPV) calculated over project periods of 25, 30 and 40 years.


Table 19: Financial modelling results

Scenario	Item	25 YEARS	30 YEARS	40 YEARS
Core	IRR	11.6%	12.1%	12.3%
	NPV 3.5% Discount Rate (k£)	13,612	17,757	21,123
Core + Erith	IRR	8.3%	9.0%	9.3%
	NPV 3.5% Discount Rate (k£)	11,457	16,089	20,271

5.7.3 Cashflow

Projected cashflows for the two modelled scenarios are shown in Figure 35 and Figure 36.

PROJECT CASHFLOW

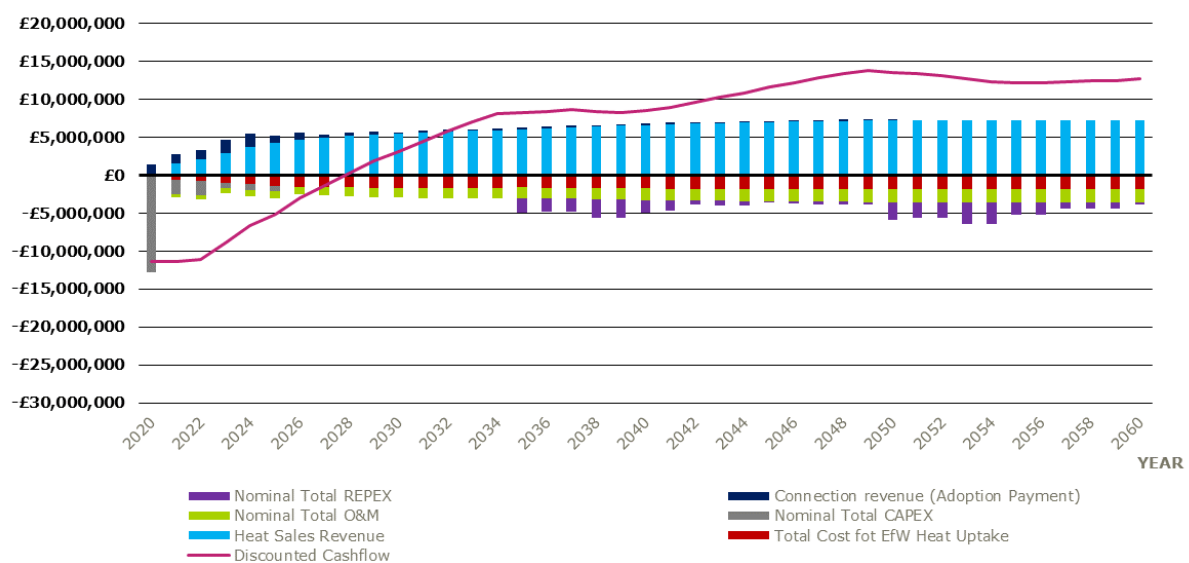**Figure 35: Cashflow for Core Scheme**

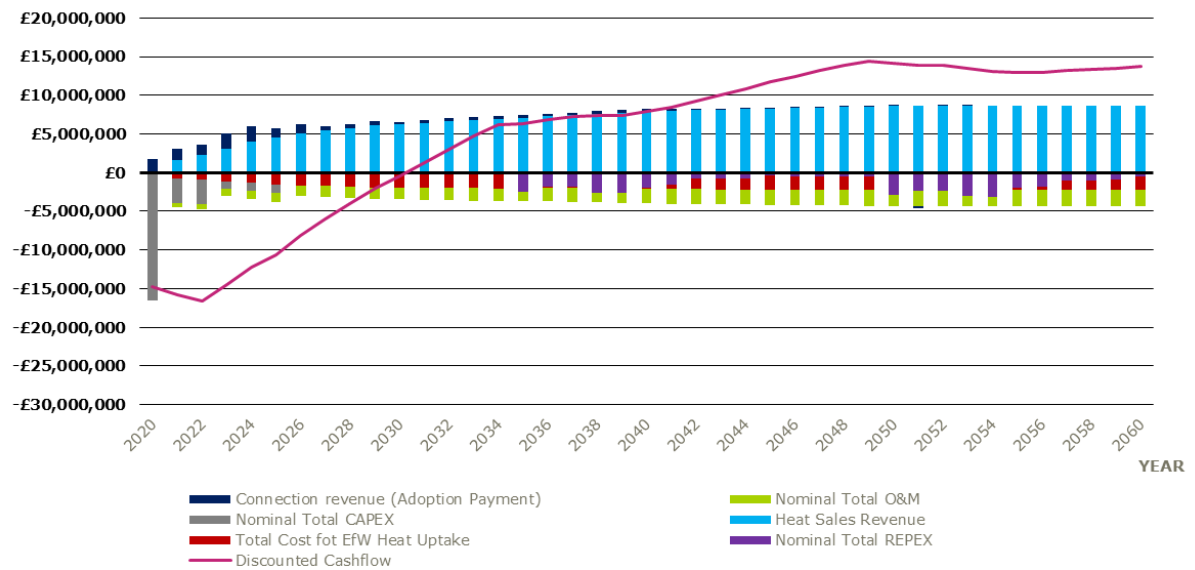
PROJECT CASHFLOW

Figure 36: Cashflow for Core Scheme plus Erith extension

5.7.4 Sensitivity Analyses

Sensitivity analyses were performed on the WP2 techno-economic model to test its response to a varying of the following key variables:

1. CAPEX
2. Resi variable heat price
3. Resi Standing
4. Non Resi Variable
5. Non-Residential Standing
6. Sensitivity Variable
7. EfW Availability
8. Network Heat Losses
9. Connected Customers Reduction
10. Resi and Non Resi
11. Sensitivity Variable
12. Occupancy levels
13. Sensitivity Variable
14. Investment Hurdle Rate (m£)

5.7.4.1 Core

The findings presented in Table 20 and Table 21 use a colour code to illustrate the variables that lead to an increased (Green) and decreased (Red) IRR.

Table 20: Sensitivity Analysis Results - Core (1)

Sensitivity Variable	IRR	-30%	-20%	-10%	0%	10%	20%	30%
CAPEX	25 years	19.8%	16.4%	13.7%	12%	9.9%	8.5%	7.3%
	30 years	20.0%	16.6%	14.1%	12%	10.5%	9.2%	8.1%
	40 years	20.0%	16.7%	14.2%	12%	10.8%	9.5%	8.4%
Resi variable heat price	25 years	7.3%	8.9%	10.3%	12%	12.8%	13.9%	14.9%
	30 years	8.2%	9.6%	10.9%	12%	13.2%	14.3%	15.3%
	40 years	8.3%	9.8%	11.1%	12%	13.4%	14.4%	15.4%
Resi Standing	25 years	3.2%	6.7%	9.4%	12%	13.6%	15.4%	17.0%
	30 years	4.6%	7.6%	10.0%	12%	14.0%	15.7%	17.3%
	40 years	4.4%	7.8%	10.2%	12%	14.1%	15.8%	17.4%

Sensitivity Variable	IRR	-30%	-20%	-10%	0%	10%	20%	30%
Non Resi Variable	25 years	10.6%	10.9%	11.3%	12%	11.9%	12.3%	12.6%
	30 years	11.2%	11.5%	11.8%	12%	12.4%	12.7%	13.0%
	40 years	11.3%	11.7%	12.0%	12%	12.6%	12.9%	13.2%
Non-Residential Standing	25 years	11.5%	11.5%	11.6%	12%	11.7%	11.7%	11.8%
	30 years	12.0%	12.0%	12.1%	12%	12.2%	12.2%	12.3%
	40 years	12.2%	12.2%	12.2%	12%	12.3%	12.4%	12.4%

Table 21: Sensitivity Analysis Results - Core (2)

Sensitivity Variable	IRR	25%	50%	75%
EfW Availability	25 years	No IRR available	-2.3%	8.3%
	30 years	No IRR available	0.4%	9.0%
	40 years	No IRR available	No IRR available	9.2%
		50%	150%	200%
Network Heat Losses	25 years	11.3%	10.6%	10.2%
	30 years	11.8%	11.1%	10.8%
	40 years	12.0%	11.3%	11.0%
		-10%	-20%	-30%
Connected Customers Reduction Resi and Non Resi	25 years	8.3%	5.1%	-1.7%
	30 years	9.0%	6.2%	0.7%
	40 years	9.2%	6.3%	-0.4%
	IRR	90%	80%	70%
Occupancy levels	25 years	11.5%	11.3%	11.2%
	30 years	12.0%	11.8%	11.7%
	40 years	12.1%	12.0%	11.8%
	IRR	8%	10%	12%
Investment Hurdle Rate (m£)	40 years	0	0	0

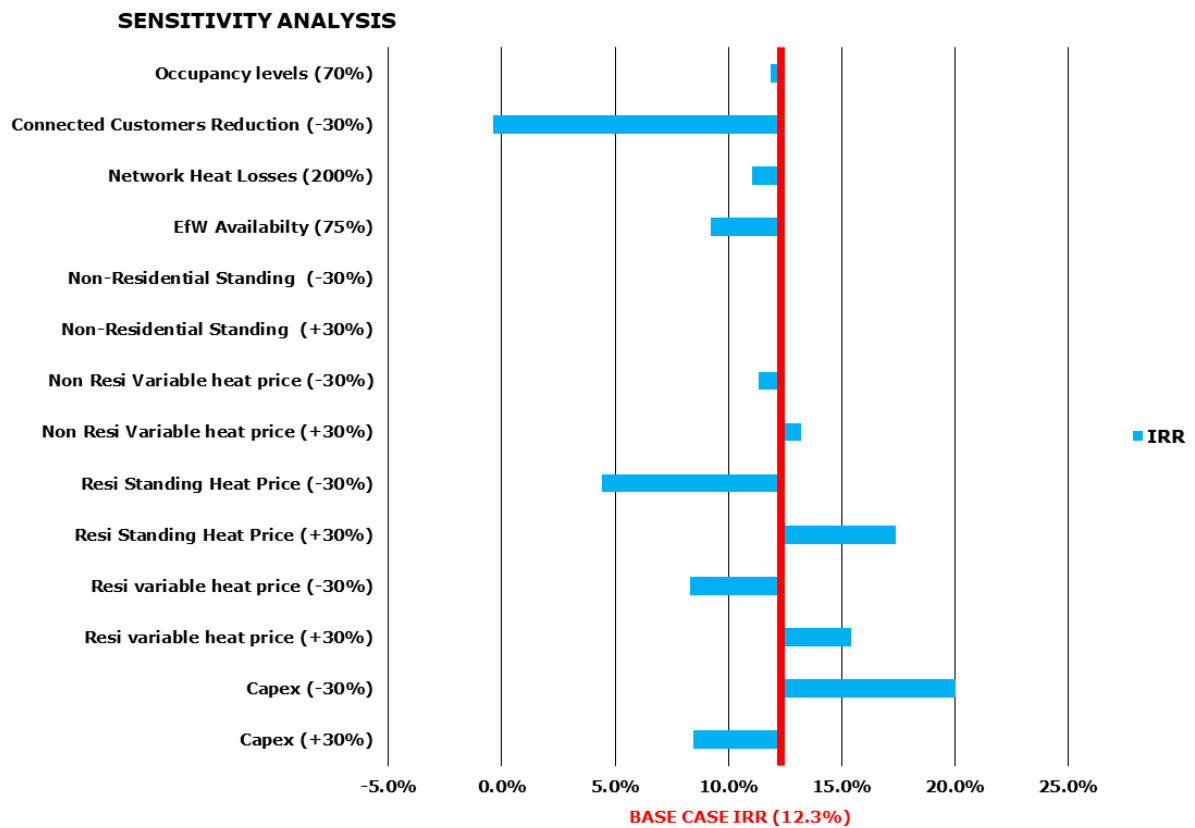


Figure 37: Sensitivity Analysis for the Core Scheme

5.7.4.2 Core & Erith

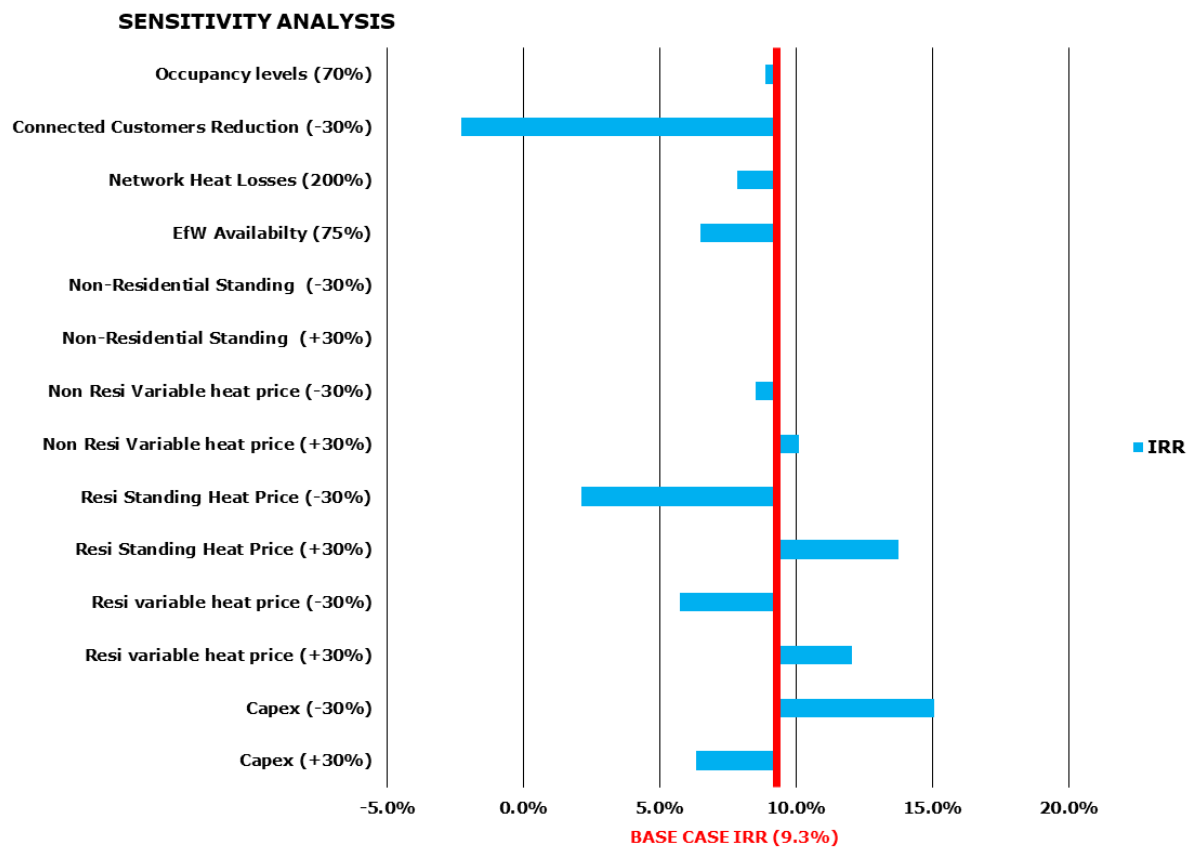
The findings presented in Table 22 and Table 23 use a colour code to illustrate the variables that lead to an increased (Green) and decreased (Red) IRR.

Table 22: Sensitivity Analysis Results – Core & Erith (1)

Sensitivity Variable	IRR	-30%	-20%	-10%	0%	10%	20%	30%
CAPEX	25 years	14.6%	12.0%	9.9%	8%	6.9%	5.8%	4.8%
	30 years	15.0%	12.4%	10.5%	9%	7.8%	6.7%	5.8%
	40 years	15.1%	12.6%	10.8%	9%	8.2%	7.2%	6.3%
Resi variable heat price	25 years	4.4%	5.8%	7.1%	8%	9.4%	10.4%	11.3%
	30 years	5.4%	6.7%	7.9%	9%	10.0%	10.9%	11.8%
	40 years	5.8%	7.1%	8.3%	9%	10.3%	11.2%	12.1%
Resi Standing	25 years	0.6%	3.8%	6.3%	8%	10.1%	11.7%	13.1%
	30 years	2.1%	4.9%	7.1%	9%	10.7%	12.2%	13.6%
	40 years	2.1%	5.3%	7.5%	9%	10.9%	12.4%	13.8%
Non Resi Variable	25 years	7.4%	7.7%	8.0%	8%	8.6%	8.9%	9.1%
	30 years	8.2%	8.5%	8.7%	9%	9.3%	9.5%	9.8%
	40 years	8.5%	8.8%	9.1%	9%	9.6%	9.8%	10.1%
Non-Residential Standing	25 years	8.2%	8.2%	8.3%	8%	8.3%	8.4%	8.4%
	30 years	8.9%	8.9%	9.0%	9%	9.0%	9.1%	9.1%
	40 years	9.2%	9.3%	9.3%	9%	9.4%	9.4%	9.4%

Table 23: Sensitivity Analysis Results – Core & Erith (2)

Sensitivity Variable	IRR	25%	50%	75%
EfW Availability	25 years	No IRR available	-5.2%	5.2%
	30 years	No IRR available	-2.6%	6.1%
	40 years	No IRR available	No IRR available	6.5%
		50%	150%	200%
Network Heat Losses	25 years	7.7%	6.9%	6.6%
	30 years	8.5%	7.8%	7.4%
	40 years	8.8%	8.2%	7.8%
		-10%	-20%	-30%
Connected Customers Reduction Resi and Non Resi	25 years	5.4%	2.4%	-3.7%
	30 years	6.3%	3.7%	-1.3%
	40 years	6.7%	4.0%	-2.3%
		90%	80%	70%
Occupancy levels	25 years	8.1%	8.0%	7.8%
	30 years	8.9%	8.7%	8.5%
	40 years	9.2%	9.0%	8.9%
		8%	10%	12%
Investment Hurdle Rate (m£)	40 years	0.0	1.3	4.0

**Figure 38: Sensitivity Analysis for the Core & Erith Scheme**

5.7.4.3 Compound Sensitivity

In addition to the sensitivity analysis based on key parameter variation in isolation, a compound sensitivity analysis was also undertaken within which every identified parameter was set to a negative 10% increment in terms of financial performance.

For example; overall CAPEX was **INCREASED** by 10% whereas variable heat price for residential customers was **REDUCED** by 10%. This approach led to application of the following sensitivities for each parameter:

- CAPEX +10%
- Resi variable heat price -10%
- Resi Standing -10%
- Non Resi Variable -10%
- Non-Residential Standing -10%
- EfW Availability 81%
- Network Heat Losses 110%
- Connected Customers -10%
- Occupancy level 90%

When applied to the Core scheme, the 40 year IRR figure resulting from this compound sensitivity was **-1.2%**.

The investment hurdle rate to reach an IRR of 5% was also assessed which indicated a requirement for capital injection of **£7.2m**, representing 38% of the total capital cost of the scheme.

5.7.5 Dividend Return Analysis

A further discrete analysis was undertaken to test (at a high level) the impact upon the modelled Core scheme network commercial performance of a third-party investor, such as LBB, requiring receipt of an annual dividend from commencement of the project.

With the techno-economic model compiled at this stage not being a full commercial model, and not featuring full financial variables and functionality, an approximation of this arrangement was tested via an inflation of the applied borrowing cost factor. Set at 4.5% by default, this was increased to 9.5% in order to simulate the provision of a 5% dividend against CAPEX investment (assuming no CAPEX phasing).

Revised ranges of approximate internal rate of return (IRR) and net present value (NPV) resulting from this approach, calculated over project periods of 25, 30 and 40 years are displayed, in Table 24.

Table 24: Financial modelling results for dividend return simulation

Scenario	Item	25 YEARS	30 YEARS	40 YEARS
Core	IRR	9.6%	10.2%	10.4%
	NPV 3.5% Discount Rate (k£)	12,175	16,320	19,686

6. CO₂ EMISSIONS ASSESSMENT

Following commencement of Work Package 2, a meeting was held with the GLA on 28th January 2019 to discuss an acceptable method for determining CO₂ emissions attributable to network operation and, in particular, the relative savings provided when compared against a counterfactual case.

In recognition of the changing requirements placed on new developments within London, it was decided to reflect and model multiple counterfactual cases, as described further in this section.

6.1 Counterfactual Definition

The carbon intensity of heat produced by the energy from waste plant was calculated and compared against three counterfactual cases, comprising the following:

1. A scheme served by Air-Source Heat Pumps (ASHP).
2. A scheme served by gas-fired CHP plant.
3. A scheme served fully by gas boilers.

In the case of the gas CHP and ASHP scenarios, the low carbon assets were assumed to cover 70% of the annual heat demand, supplemented by gas boilers.

Results determined from these counterfactual cases are summarised in Table 25.

Table 25: Summary of Counterfactual Cases

Counterfactual Heat Supply Technology	Specifications of Heat Supply Technology	Additional Heat Source	Percentage Contribution from Additional Source	Specifications of Additional Source
ASHP	COP 2.8	Gas Boilers	30%	Efficiency 88%
Gas CHP	Electrical Efficiency 38%; Thermal Efficiency 40%	Gas Boilers	30%	Efficiency 88%
Gas Boilers	Efficiency 88%	-	-	-

6.1.1 Counterfactual Emissions Calculation

The carbon intensity of the counterfactual scenarios was calculated for the years 2019 to 2045, using BEIS projections of the carbon intensity of gas² and electricity³ over this period. This takes into account the future expected decarbonisation of the electrical grid.

The carbon emission for the heat output of a combined heat and power cycle (CHP) is driven by a combination of the carbon factor of gas and the carbon offset in the electricity grid. DECC has commissioned a report to examine the typology of electrical generation offset by additional CHP capacity.⁴

² Greenhouse gas reporting: conversion factors 2018, <https://www.gov.uk/government/publications/greenhouse-gas-reporting-conversion-factors-2018>

³ Green Book supplementary guidance, <https://www.gov.uk/government/publications/valuation-of-energy-use-and-greenhouse-gas-emissions-for-appraisal>

⁴ <https://www.gov.uk/government/publications/bespoke-natural-gas-chp-analysis>

Figure 39 provides a resulting time series for the average carbon intensity of electricity displaced by gas CHP, either via export or on-site consumption.

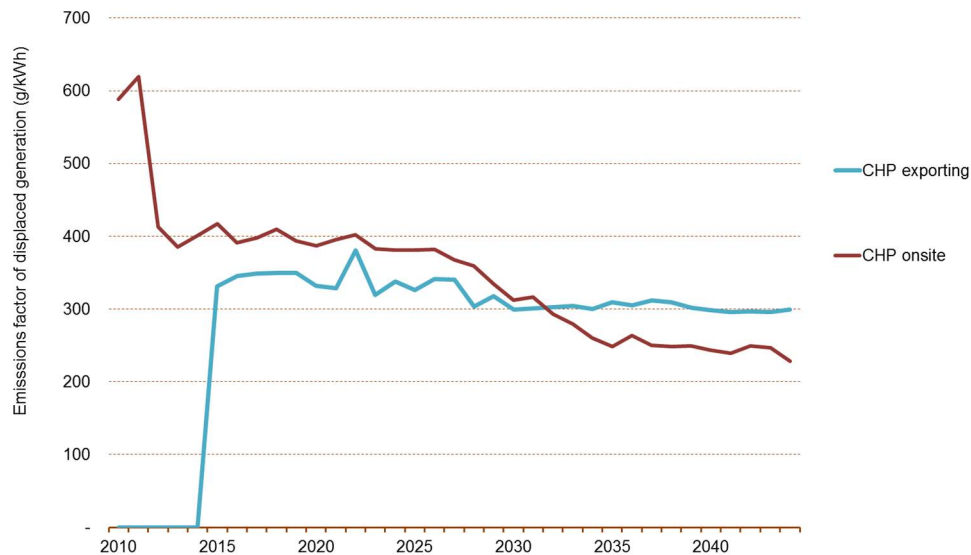


Figure 39: Figures underlying chart on p.67 of Modelling the impacts of additional Gas CHP capacity in the GB electricity market (LCP)

The fluctuations shown in the emissions attributed to electrical generation from gas CHP lead to a corresponding variability in the resulting carbon intensity of heat, as displayed in Figure 40 alongside those for other counterfactual cases modelled.

CARBON INTENSITY OF HEAT

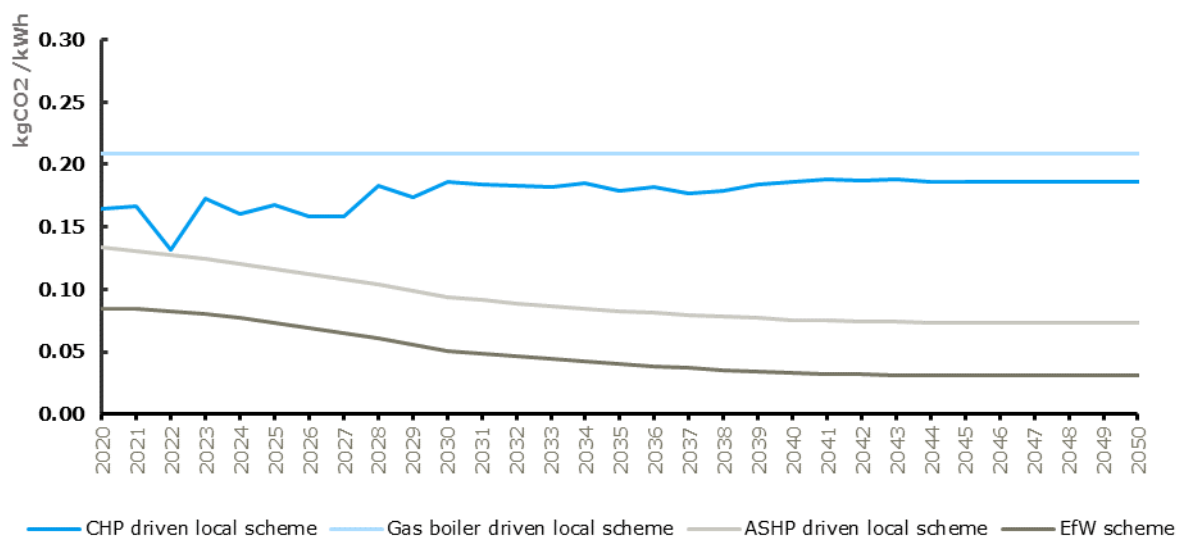


Figure 40: Carbon intensity of heat from network and all counterfactual scenarios

In all cases the annual heat demand was assumed to be consistent over time. When necessary this demand was split between gas boilers and another technology, as stated in Table 25.

Using the specifications listed in this table, the annual gas and electricity consumption was calculated for each scenario and the carbon intensities applied in order to determine the carbon emissions in each case. In this way, the amount of carbon dioxide equivalent emissions per kWh of heat energy were calculated, with the results shown in Table 26 .

Table 26: Annual carbon emissions predictions

	Year	2021	2026	2031	2036	2041	2046
ASHP driven local scheme	ton CO _{2e}	2,862	7,657	7,195	7,033	7,099	7,262
CHP driven local scheme	ton CO _{2e}	3,638	10,747	14,541	15,765	17,800	18,468
Gas boiler driven local scheme	ton CO _{2e}	4,576	14,222	16,479	18,136	19,793	20,768
EfW scheme	ton CO _{2e}	2,122	4,934	3,972	3,447	3,182	3,136
Net savings from a gas boiler scheme	ton CO _{2e}	2,454	9,288	12,507	14,689	16,611	17,632
	%	54%	65%	76%	81%	84%	85%

Table 26 summarises carbon emission figures for selected years based on technology and development of heat demand. The EfW emissions include the emissions corresponding to distribution losses (3%-13% depending on build-out) as well as the boiler share of heat.

Overall, while the grid decarbonises and the EfW emissions associated with reduced electrical exports diminish, the scheme is expected to save up to 85% compared to a gas boiler driven heat network.

Compared to an ASHP driven network, the EfW scheme is expected to emit less than 50%. The main drivers is the z factor which is way higher than an ASHP seasonal COP (~2.8) and the significant gas boiler contribution to any ASHP scheme (~ 30%).

6.2 Network Heat Emissions

From Table 26, it can be seen that consumption of heat offtake from the energy from waste plant has a lower carbon intensity than all counterfactual cases over the entire period modelled.

These emissions were calculated using the following assumptions:

- The EfW plant was assumed to meet 90% of the yearly demand, with a 10% contribution from gas boilers with an efficiency of 88%.
- The ratio of sacrificed electrical generation in order to produce heat (the 'Z-Factor') was modelled at 4.3.
- Electrical consumption for pumping and other parasitic load was modelled as 2.5% of the annual heat supplied by the network.

In keeping with the counterfactual cases modelled, the gas and electricity consumed along with the carbon factors for gas and electricity were used to calculate the carbon intensity of the heat from the energy from waste plant.

7. CONCLUSIONS & RECOMMENDATIONS

7.1 Conclusions

The key conclusions emerging from Work Package 2 are as follows:

1. The total level of heat demand and annual consumption determined for all loads modelled for connection to an initial "Core Scheme" network, comprising the Belvedere, Thamesmead and Abbey Wood redevelopment areas (plus limited adjacent existing buildings/sites) can be met via heat offtake from the Cory EFW plant.
2. In line with Cory's proposed annual availability of 90% for heat offtake, the provision of supplementary heat generation and storage is required to meet year-round demand and is proposed to comprise a mix of centralised and distributed plant.
3. The techno-economic modelling undertaken indicates that delivery and operation of a full Core Scheme network could achieve IRRs in the region of 8.3% – 12.3% (depending upon its extension into Erith) and positive NPVs, whilst providing competitively priced heat to all connected customers.
4. The utilising of heat generated from the Cory plant, at the point of full Core Scheme buildout, could deliver an overall CO₂ saving of 3,970 tonnes/annum against a counterfactual case of new Air-Source Heat Pump plant, adhering to projected new London Plan requirements, or 14,900 tonnes/annum against a case of gas-fired CHP led communal heating schemes.
5. If a more aggressive build-out scenarios are considered for both the Core Scheme and additional sites further afield, in both Bexley and Greenwich, it is likely that a further heat source(s) beyond the existing Cory plant would be required to meet total heat demands.

7.2 Recommendations

Based on the works undertaken throughout Work Packages 1 & 2 of this feasibility study, the following recommendations are made

- i. A number of differing growth scenarios exists and have been seen for the various development areas identified by the London Boroughs of Bexley and Greenwich. Whilst the scenarios agreed to be most realistic have been applied within this feasibility study, the next stage of work should revisit and confirm the most appropriate growth figure to use going forward.
- ii. Following early discussions around the principle of locating plant on Cory's site associated with operation of the DH network, further development of the space and access requirements is recommended in order to validate assumptions and ensure feasibility.

8. NEXT STEPS

The following are the perceived key next steps to be followed for the project as a whole, as it proceeds toward more detailed development. The timing and order of these will be subject to LBB's preference and plans, however all are intended to assist a re-risking the project and maximising its likelihood of delivery and commercial success.

- A. Project to be taken forward to the stage of developing an Outline Business Case.
- B. LBB to progress early discussions with Cory over the principles and arrangements for heat offtake pricing (with meetings in this regard already planned).
- C. Engagement with other LBB development partners to be sought to the level already in place with Peabody, with Orbit Homes identified as one such key party.
- D. LBB to consider and determine its key objectives and goals for the network and with this its preferred role and level of engagement going forward in development and delivery of the scheme, as part of wider discussions with known and potential partners.
- E. LBB to continue close working with the GLA, given the strategic importance of the project, to maintain and maximise their support and added value going forward.
- F. Seeking of advice and support from appropriate Commercial and Legal partners to develop draft agreed Heat of Terms for heat sale agreements, expected to involve (at least) Cory and Peabody.
- G. Consider in more detail the option of seeking project capital funding via the Government's HNIP scheme, including identifying the best time during project development to apply for this support.

9. STUDY ADDENDUM

Further to completion and presentation to all stakeholder of the findings from the feasibility study, Ramboll were involved with conversations and provision of discrete support to parallel works being led by Cory in relation to a proposed initial DH network linking to their plant.

This addendum provides a summary of these works plus an alternate potential set of next steps for the project from LBB's perspective, in recognition of the current and planned works by other key stakeholders.

9.1 Cory Application to Heat Networks Investment Programme (HNIP)

During a meeting with LBB and Ramboll on April 26th, Cory indicated their intention to submit a pre-application under the Government's HNIP scheme, which was put in place to offer financial support to private and public sector bodies developing new heat networks whose commercial case without external funding would fail to meet the required hurdle rates of the primary investor(s).

Under this pre-application, Cory will position themselves as project lead for undertaking or managing both heat offtake modification work at their plant and the installation of elements of a DH network.

9.1.1 Extent of Cory Heat Network

Based on the early engagement directly between Cory (and their advisors) and Peabody, the extent of the heat network proposed within their HNIP pre-application will be limited to the pipework required to route and connect to all heat loads associated with Peabody's existing and future development sites within the following areas:

1. East Thamesmead (within the Borough of Bexley).
2. South Thamesmead (Bexley).
3. North Thamesmead (Greenwich).
4. West Thamesmead (Greenwich).

The extents of the network proposed by Cory are shown in Figure 41.

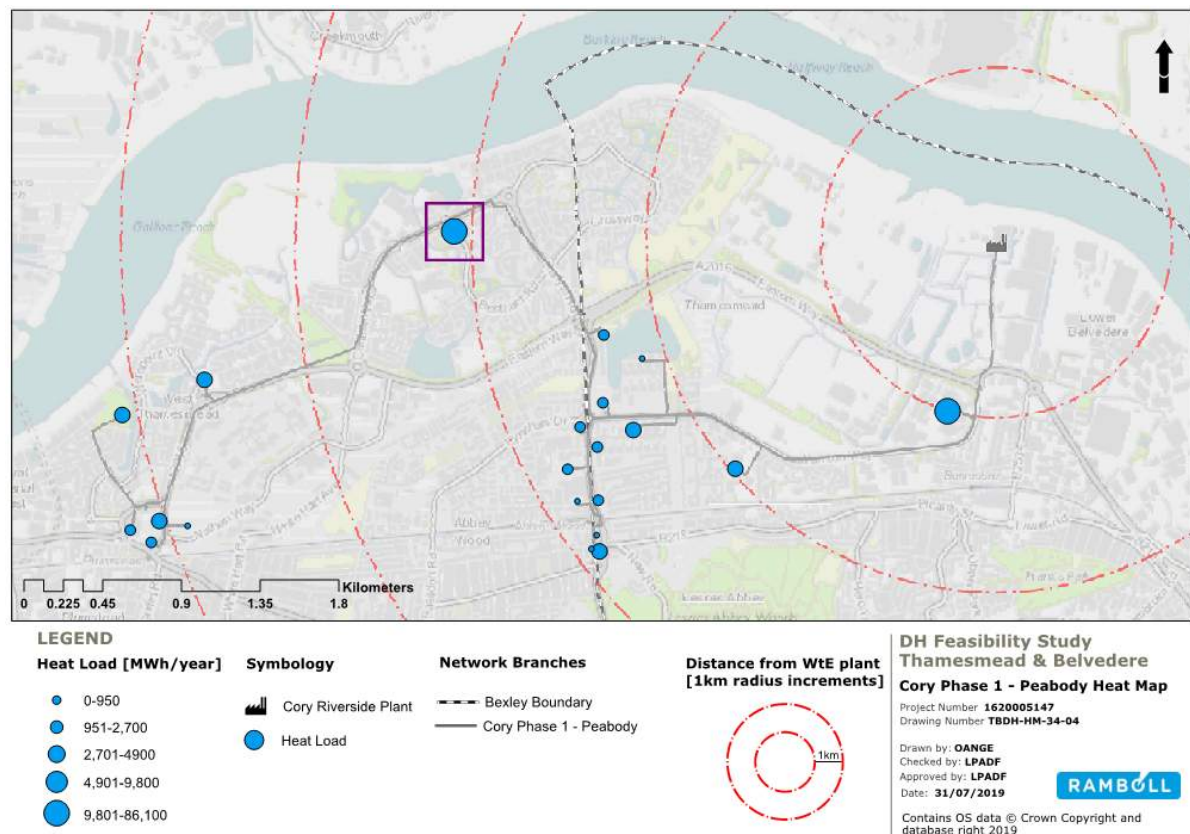


Figure 41: Extents of Cory heat network within HNIP application (Load in purple box has been modified from that assumed in the main report to reflect Peabody's maximum built out projection)

9.1.2 Ramboll Support to HNIP Pre-Application

Following consultation with LBB, it was agreed that Ramboll would provide discrete support to Cory's commercial advisors, Inventa Partners, as they compile the information required to accompany the HNIP pre-application. These works comprised the following:

- Review and comment upon draft completed pre-application form.
- Provision of an annotated version of the main study's full DH network layout with accompanying breakdown of heat loads derived for all proposed connecting sites.
- Assistance in mapping out the intended (reduced) extents of network being proposed within the Cory pre-application.
- Support to sizing main transmission pipework, ensuring any initial network remains future-proofed for latter expansion.
- Review and comment upon Inventa commercial assumptions to be applied within pre-application.

9.2 Alternate Next Steps

In light of Cory's intention to progress with the development stages for a DH network, there is potential for LBB to play a different role in supporting the development of the project going forward.

In order that this role and its benefits are duly assessed, whilst the support already in place from the Government's HNDU programme retained and best utilised, the following set of potential alternate next steps are recommended for consideration:


- A. LBB to consider and determine its key objectives and goals for the network and with this its preferred role and level of engagement going forward in development and delivery of the scheme, as part of wider discussions with known and potential partners (*retained*).
- B. LBB to meet with HNDU to discuss ways in which current funding, in place to support an Outline Business Case piece of work, might better be used to develop further a framework under which LBB can support and liaise with Cory as project leads for initial network development (**new**).
- C. LBB to seek advice and support from appropriate Commercial and Legal partners to develop draft agreed Heat of Terms for heat sale agreements, expected to involve (at least) Cory and Peabody (*retained*).
- D. LBB to continue dialogue with Cory around initial network development, with potential to retain (and possibly fund) a level of technical input to ensure the larger scale of intended final network is facilitated, alongside any potential capital investment in the project (**new**).
- E. Engagement with other LBB development partners to be sought to the level already in place with Peabody, with Orbit Homes identified as one such key party (*retained*).

APPENDIX 1

HEAT NETWORK SCHEMATIC

Notes

1. ALL DIMENSIONS ARE IN METERS U.N.O.

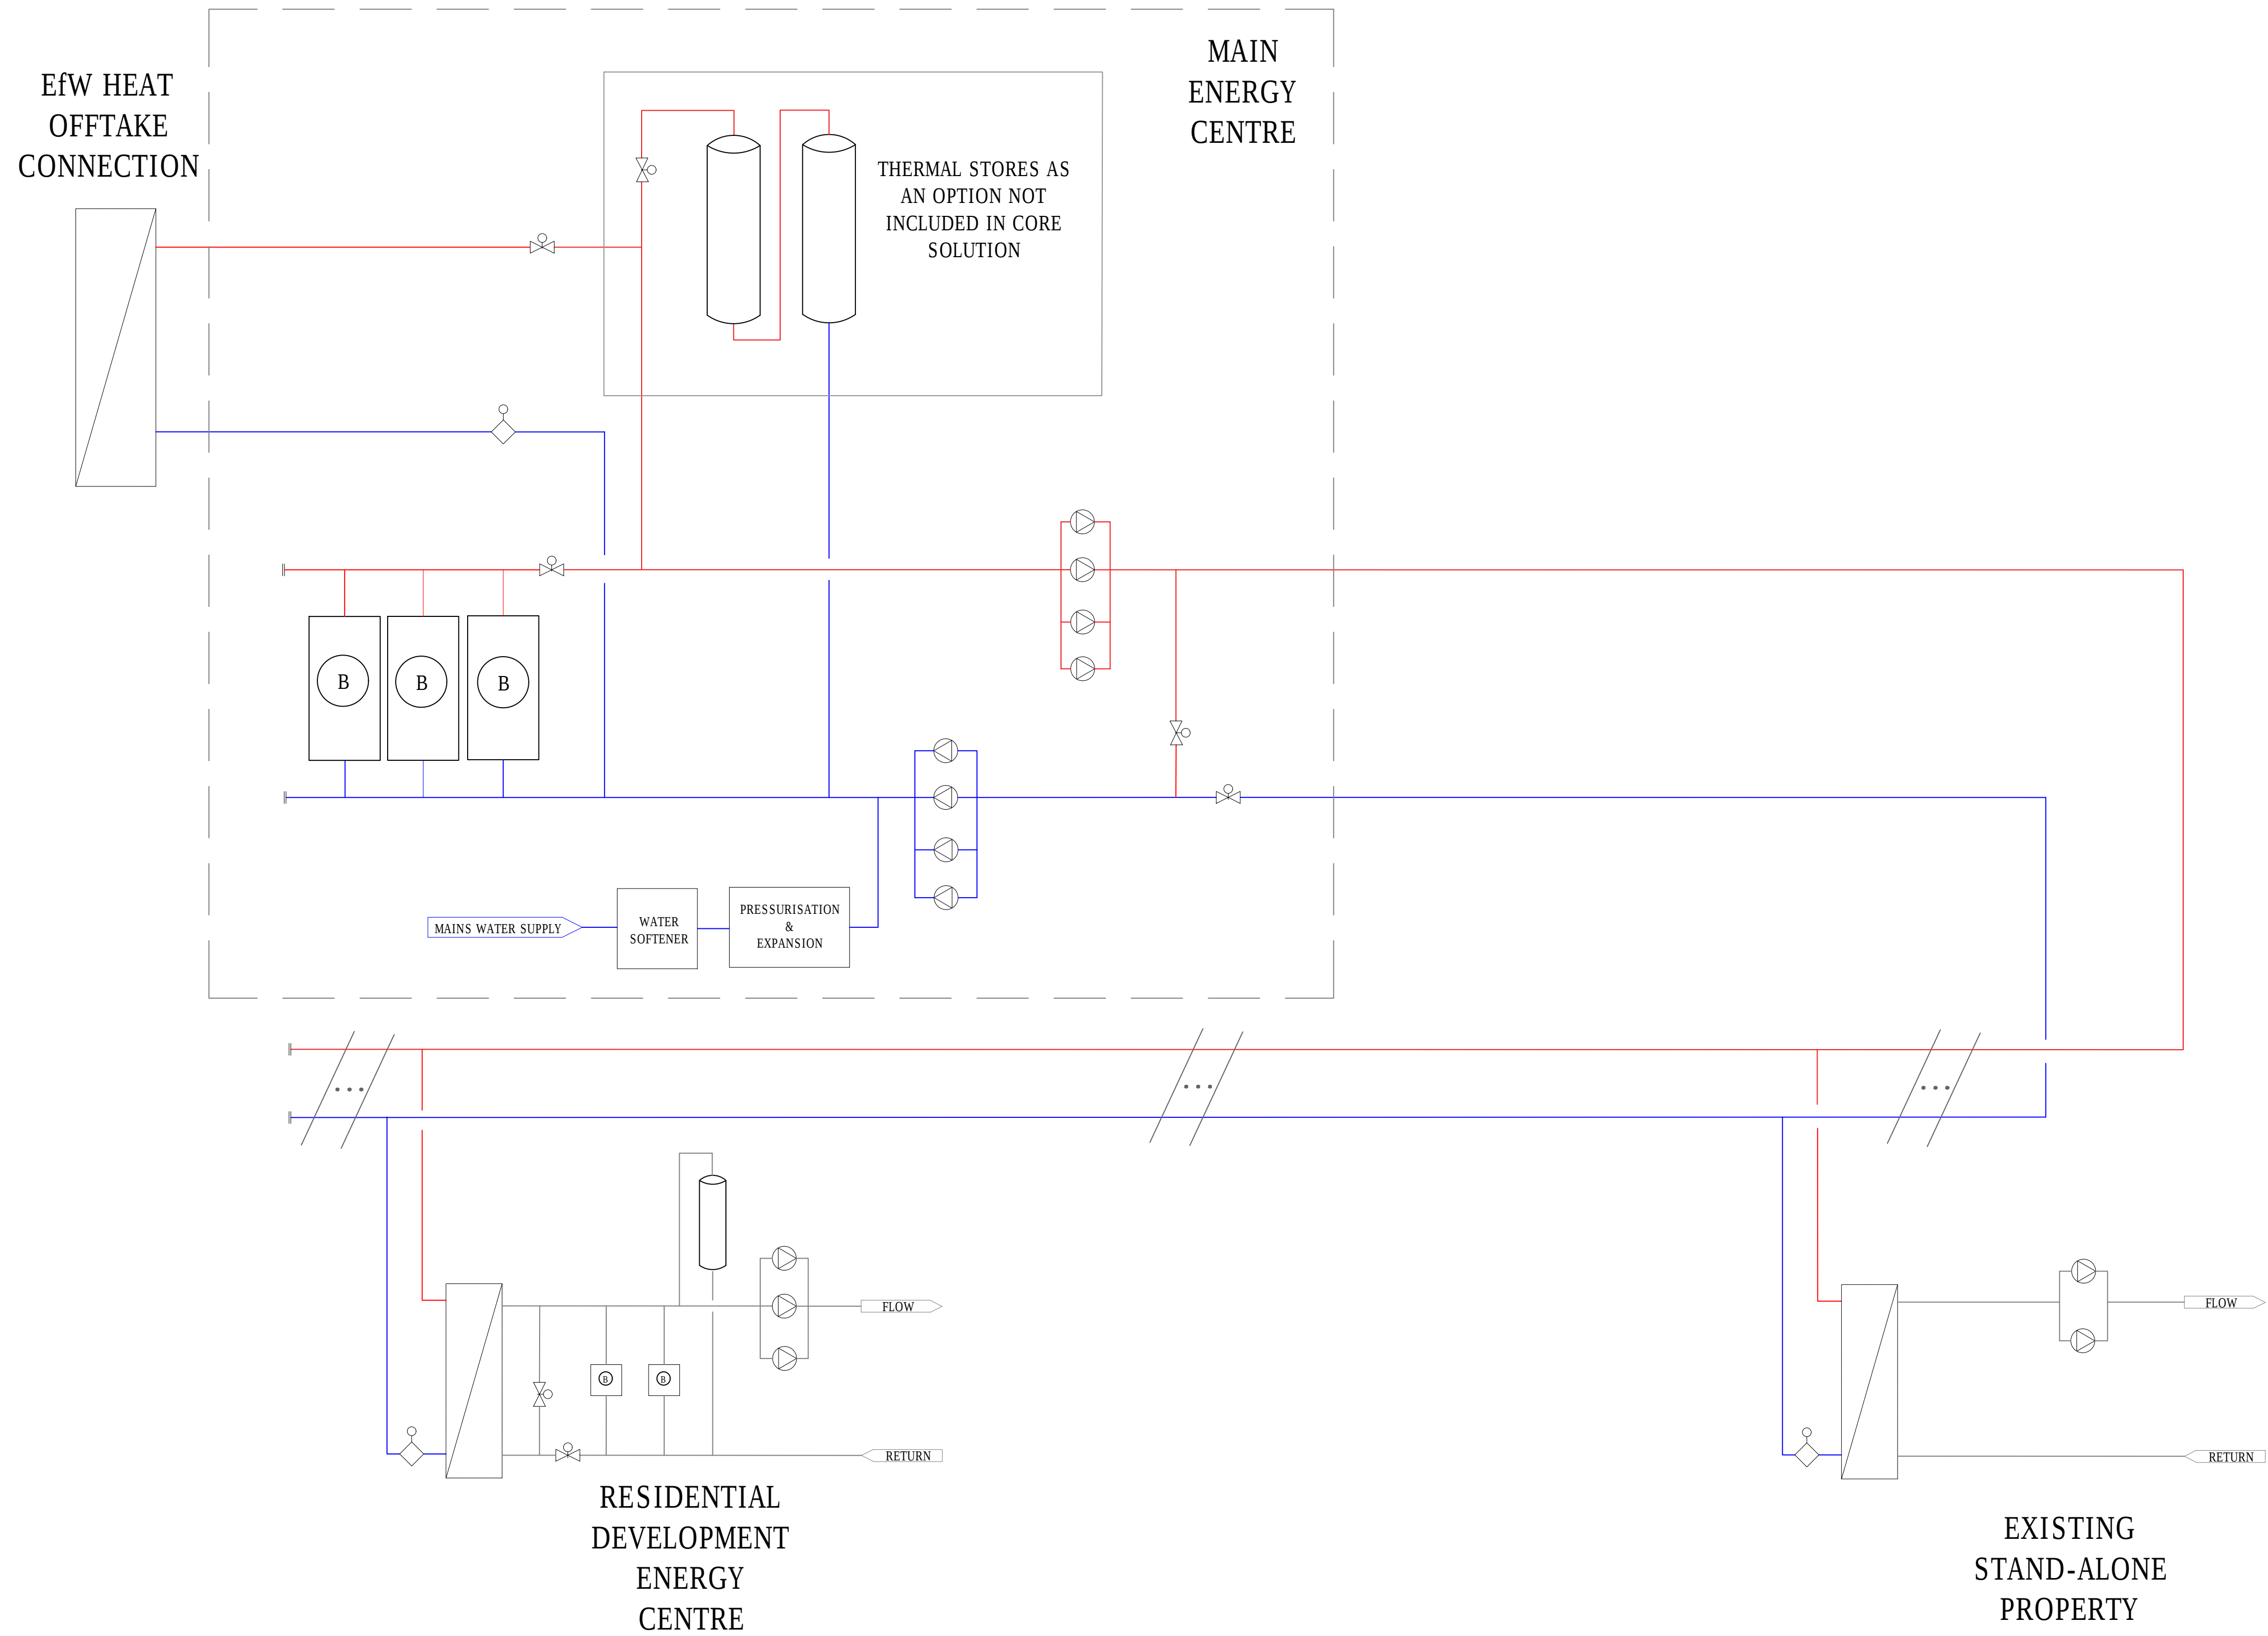

Rev	Description	Date	By CHK	App
01	PRELIMINARY	Apr-19		

Thamesmead & Belvedere DHFS

RAMBOLL


tel 020 7631 5291 london@ramboll.co.uk
www.ramboll.co.uk

BEXLEY DHN SCHEMATIC

Project No: 1620005147	Scale (@A1):	Drawn: ELOCK	Date: Apr-19
Drawing No:			Rev: 01

APPENDIX 2

DH NETWORK PUMPING & CONTROL CENTRE LAYOUT

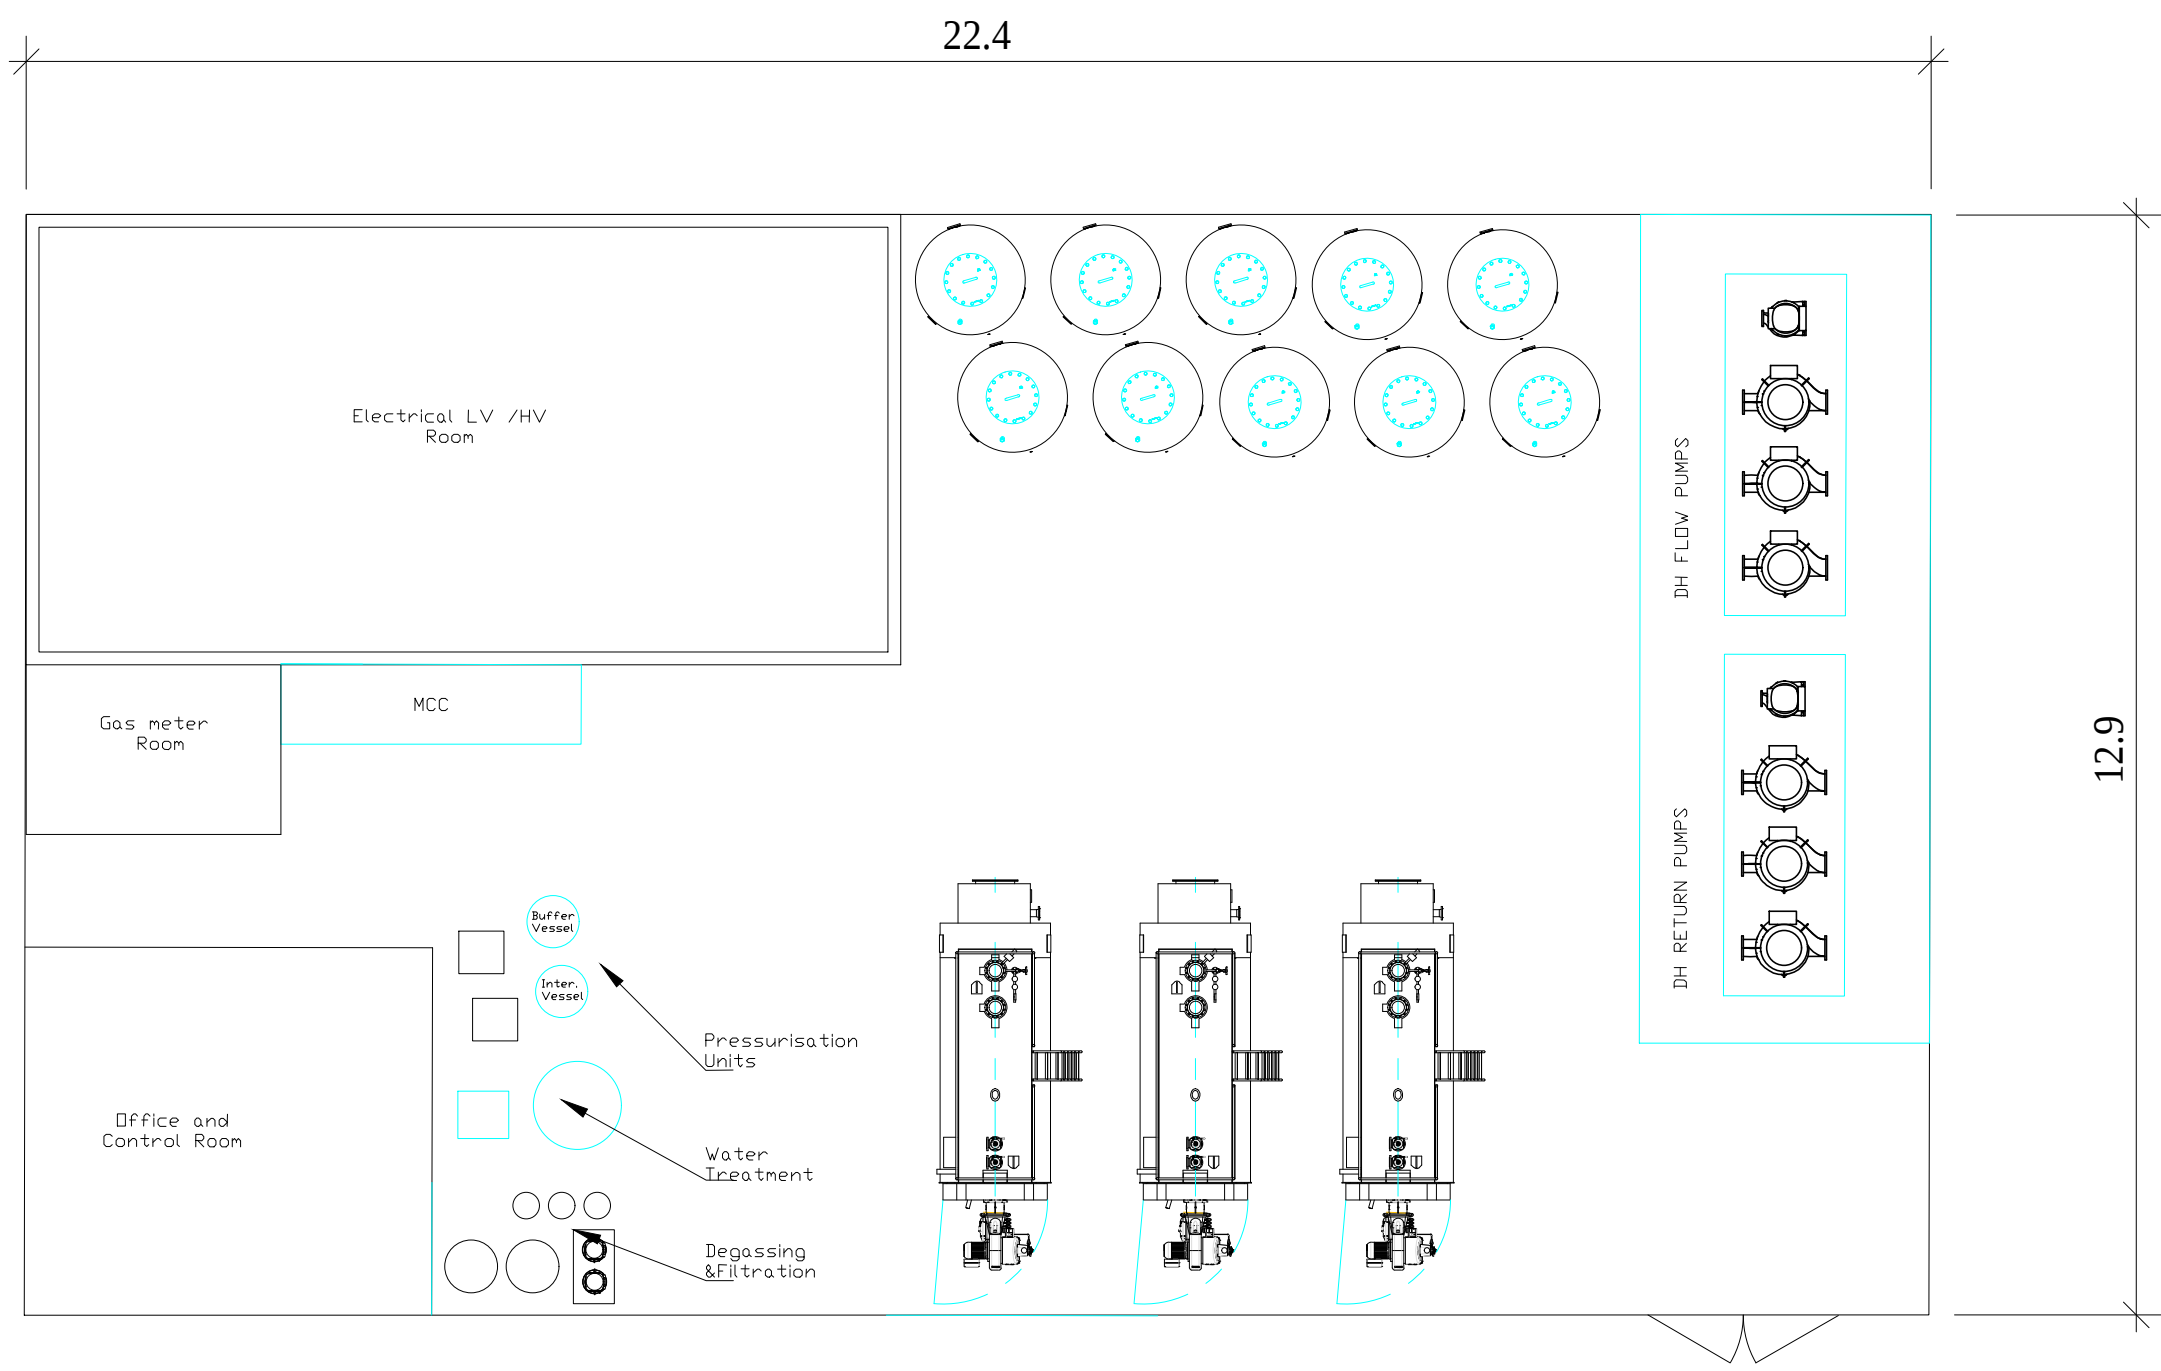

COPYRIGHT RAMBOLL UK LIMITED. ALL RIGHTS RESERVED. THIS DOCUMENT IS ISSUED FOR THE PARTY WHO COMMISSIONED IT AND FOR THE SPECIFIC PURPOSES CONNECTED WITH THE PROJECT ONLY. IT SHOULD NOT BE RELIED UPON BY ANY OTHER PARTY OR USED FOR ANY OTHER PURPOSE. RAMBOLL ACCEPTS NO RESPONSIBILITY OR LIABILITY WHICH MAY ARISE FROM RELIANCE OR USE OF THIS DOCUMENT OR THE DATA CONTAINED HEREIN BY ANY OTHER PARTY OR FOR ANY OTHER PURPOSE.

Notes

- 1. ALL DIMENSIONS ARE IN METERS U.N.O.

Rev	Description	Date	By	App
01	PRELIMINARY	Apr-19	ACH	OP

Thamesmead & Belvedere DHFS

tel 020 7631 5291 london@ramboll.co.uk
www.ramboll.co.uk

DHN Distribution Plantroom

Project No: 1620005147	Scale (@A1):	Drawn: ACHAT	Date: Apr-19
Drawing No: 1620005147-PS-GA-001			Rev: 1.1

APPENDIX 3

DESIGN RISK REGISTER

DESIGN RISK ASSESSMENT



Project Name:		Thamesmead & Belvedere DH Feasibility Study		Job No:		1620005147		Document Ref:		0-05-054	
Stage / Section of works:		Work Package 2		Issue date/revision:		30.04.2019 / V2		Project Director Approval:		LPADF	

Activity /Element Cat ¹	Nº	Risk / Opportunity Item	Implication	Risk Estimation (Residual Evaluation)				Ramboll action to eliminate risk and maximise opportunity	Residual risks / actions that remain	Action By	Status
				Probability Rating (1-4) a	Severity Rating (1-4) b	Resulting risk level (1-16) a x b	Control / Influence				
	1	ENERGY DEMAND ASSESSMENT									
P	i	Applied energy consumption benchmarks are higher or lower than those occurring in reality.	Loads determined for connecting buildings/sites are either over or under-estimated, leading to over or undersizing of related distribution infrastructure.	1	2	2	C	Benchmarks used in WP1 have been further refiend to take account of latest Ramboll project experience in this field.		Ramboll	Closed
P	ii	Modelled development quanta does not reflect that ultimately brought forward.	Loads are incorrectly determined and related distribution infrastructure not sized appropriately.	2	2	4	C	Development information has been consulted on with all relevant parties.		Ramboll	Closed
P	iii	Identified existing buildings/loads operate heating systems incompatible with connection to heat network.	Loads are incorrectly included and related distribution infrastructure not sized appropriately.	2	1	2	C	A minimal number of existing buildings are being considered for connection to the network, with the largest of these visited during WP2 to assess feasibility.		Ramboll	Closed
	2	ENERGY SUPPLY ASSESSMENT									
P	i	Estimates of heat offtake availability from Cory plant are inaccurate.	Heat offtake and distribution equipment & infrastructure are incorrectly sized.	1	2	2	C	Cory have been consulted with during WP2 works and a heat availability factor confirmed and used within WP2 modelling work.		Ramboll	Closed
P	ii	Parameters used to determine heat offtake capacity and associated costs are inaccurate.	Impact upon accuracy of commercial case derived for new heat network.	1	3	3	C	Key parameters applied have been provided by Cory.		Ramboll	Closed
	3	ENERGY DISTRIBUTION ASSESSMENT									
P	i	Presence of obstacles or constraints preventing or limiting ability to route new heat network pipes as propsed.	Change in network routing leading to increased capital costs.	2	2	4	C	WP2 has included both a physical walking of the majority of proposed network route plus the gathering of concise information on existing buried services.		Ramboll	Closed
P	ii	Underestimation of pipework involved with connecting to new development loads within Erith area.	Alteration to hydraulic operation of network.	1	2	2	C	Further detail around Erith development quanta has been received and applied during WP2 work.		Ramboll	Closed
P	iii	Assumed pipe sizes for main distribution network are not approriate for final derived loads.	Potential limitation of network heat carrying capacity.	2	2	4	C	Full hydraulic modelling has been undertaken during WP2,a nd allowance has been made to future-proof the load-carrying capacity via an oversizing of main distribution pipework.		Ramboll	Closed
P	iv	Works not completed to size thermal stores.	Space required for thermal stores not determined.	2	3	6	C	Modelling undertaken during WP2 to size and locate thermal storage volumes, both centralised and distributed.		Ramboll	Closed
P	v	Selected approach to network hydraulic separation does not match Developer connection expectations.	Additional costs invovled with providing additional hydraulic breaks and heat exchange equipment.	1	2	2	C	Engaged developers have been provided with proposed approach to hydraulic separation and have raised no concerns.		Ramboll	Closed
	4	ECONOMIC ASSESSMENT									
P	i	Bulk heat offtake purchase price assumptions do not match those expected by Cory.	Impact upon modelled business case.	3	2	6	C	WP2 economic model has been built and includes heat offtake & purchase assumptions in line with Cory discussions.	Further development of a project Commercial Case to continue process of Cory engagement.	LBB	Open
P	ii	Definition and delineation of heat network roles do not reflect stakeholders preferences.	Alterations required to economic modelling.	2	1	2	C	WP2 modelling has been based around current thinking of all parties on roles within network delivery and operation.		Ramboll	Closed
P	iii	Price comparator calculations undertaken for Resi and non-Resi customers do not reflect true market values.	Impact upon modelled business case.	1	3	3	C	Price comparators have been revised as part of WP2 modelling work to ensure these are as representative as possible.	Subsequent Commercial Case development to include a revisitation of these calculations.	LBB	Open
P	iv	Underestimation of CAPEX associated with plant and infrastructure.	Impact upon modelled business case.	2	3	6	C	Ramboll experience and means-tested benchmarks used to derive CAPEX figures.		Ramboll	Closed
P	v	Underestimation of pipework involved with connecting to new development loads within Erith area.	Impact upon accuracy of commercial case derived for new heat network.	2	2	4	C	Further detail around Erith development quanta has been received and applied during WP2 work.		Ramboll	Closed
P	ix	Underestimation of pipework involved with connecting to new development loads within Erith area.	Impact upon accuracy of commercial case derived for new heat network.	2	2	4	C	Further detail around Erith development quanta has been received and applied during WP2 work.		Ramboll	Closed

1 (C) CDM / (P) Project / (E) Environmental