


Z:\17188_ABERFELDY_VILLAGE_MASTERPLAN\CAD\DRAWINGS\STAGE 2_PLANNING UPDATE_JOLLYS GREEN_MARCH 2022\AVL-LDA-SBX-XX-XX-DR-L-0205.DWG

REFER TO DRAWING AVL-LDA-SBX-XX-XX-DR-L-0204



- GENERAL**
- OUTLINE PLANNING APPLICATION BOUNDARY
 - DETAILED PLANNING APPLICATION BOUNDARY
 - +0.00e EXISTING LEVEL
 - +0.00 PROPOSED LEVEL
- PAVING TYPES**
- TARMAC ULTICOLOUR COLOUR: BUFF
 - TARMAC ULTICOLOUR COLOUR: LIGHT BUFF
 - CEDEC SELF BINDING GRAVEL COLOUR: GOLD
- EDGE TYPES**
- 0.9M HIGH PLAYGROUND FENCE WITH SELF-CLOSING SAFETY GATES
 - 1.1M HIGH PARK FENCE WITH DOUBLE OR SINGLE GATES AS SHOWN
 - METAL EDGING TO RAISED PLANTERS UP TO 0.5M HIGH STEEL WITH CORTEN FINISH
 - METAL EDGING TO PLANTERS 100MM HIGH STEEL WITH CORTEN FINISH
- SOFTWORKS**
- PROPOSED TREE
 - EXISTING TREE
 - LOW MAINTENANCE BORDER SHRUB PLANTING
 - AMENITY LAWN
 - ORNAMENTAL PERENNIAL AND GRASSES PLANTING
- FURNITURE TYPES**
- TREE GRILLES: GREEN/BLUE/URBAN CASTLE TREE GRILLE 20A (SQUARE 2M) AND DTS YARE (CIRCLE 1.2M) INFILLED WITH SURFACE TO MATCH SURROUNDS
 - SHEFFIELD CYCLE STAND (750 X 48 X 750MM)
 - BIN - BROXAP HERITAGE BLACK (NO GOLD LETTERING)
 - FOUNTAIN - ELKAY TWO STATION ADA STAINLESS STEEL DRINKING FOUNTAIN W/ DOG BOWL CURVED SEAT WITH ARMS AND BACKREST
 - BENCHES - BROXAP BLACKBURN (L:1800MM X W:605MM X H:840MM)
 - PICNIC TABLE - BROXAP 10 SEAT WATERBORN CONCRETE & TIMBER WITH 2 WHEELCHAIR SPACES
 - SIGNAGE - M&L BOW TOPPED LBTH PLAYPARK SIGNS
 - SIGNAGE - M&L SQUARE TOPPED LBTH WELCOME SIGNS
 - SUN LOUNGER AND LOW TABLE
- PLAY EQUIPMENT**
- ALL EQUIPMENT IS SUBJECT TO REVIEW AND FURTHER CONSULTATION - Indicative proposals outlined within the Design and Access Statement. Safety surfacing will be required within all fall zones. All play equipment should be steel framed with no timber structural supports. A mix of play options for children of differing age groups and accessibility needs should be provided as proposed below;
- TOTTER TRAIL (0-3 years)
 - MINI SEE-SAW (0-3 years)
 - BASKET SWING/ *YOU AND ME* SWING (0-3 years)
 - SENSORY PLAY PANELS (all ages)
 - TOWER COMBINATION (4-7 years)
 - SEE SAW (4-7 years)
 - SMALL CAROUSEL (4-7 years)
 - ACCESSIBLE CAROUSEL (4-7 years)
 - TOWER COMBINATION (4-7 years)
 - LARGE SWING/ BASKET SWINGS (8-12 years)
 - TOWER COMBINATION (8-12 years)
- Areas of wet pour safety surfacing will be required within all fall zones around play equipment, to supplier's specification. Subject to review and detailed design once equipment is finalized, current proposals indicative only.

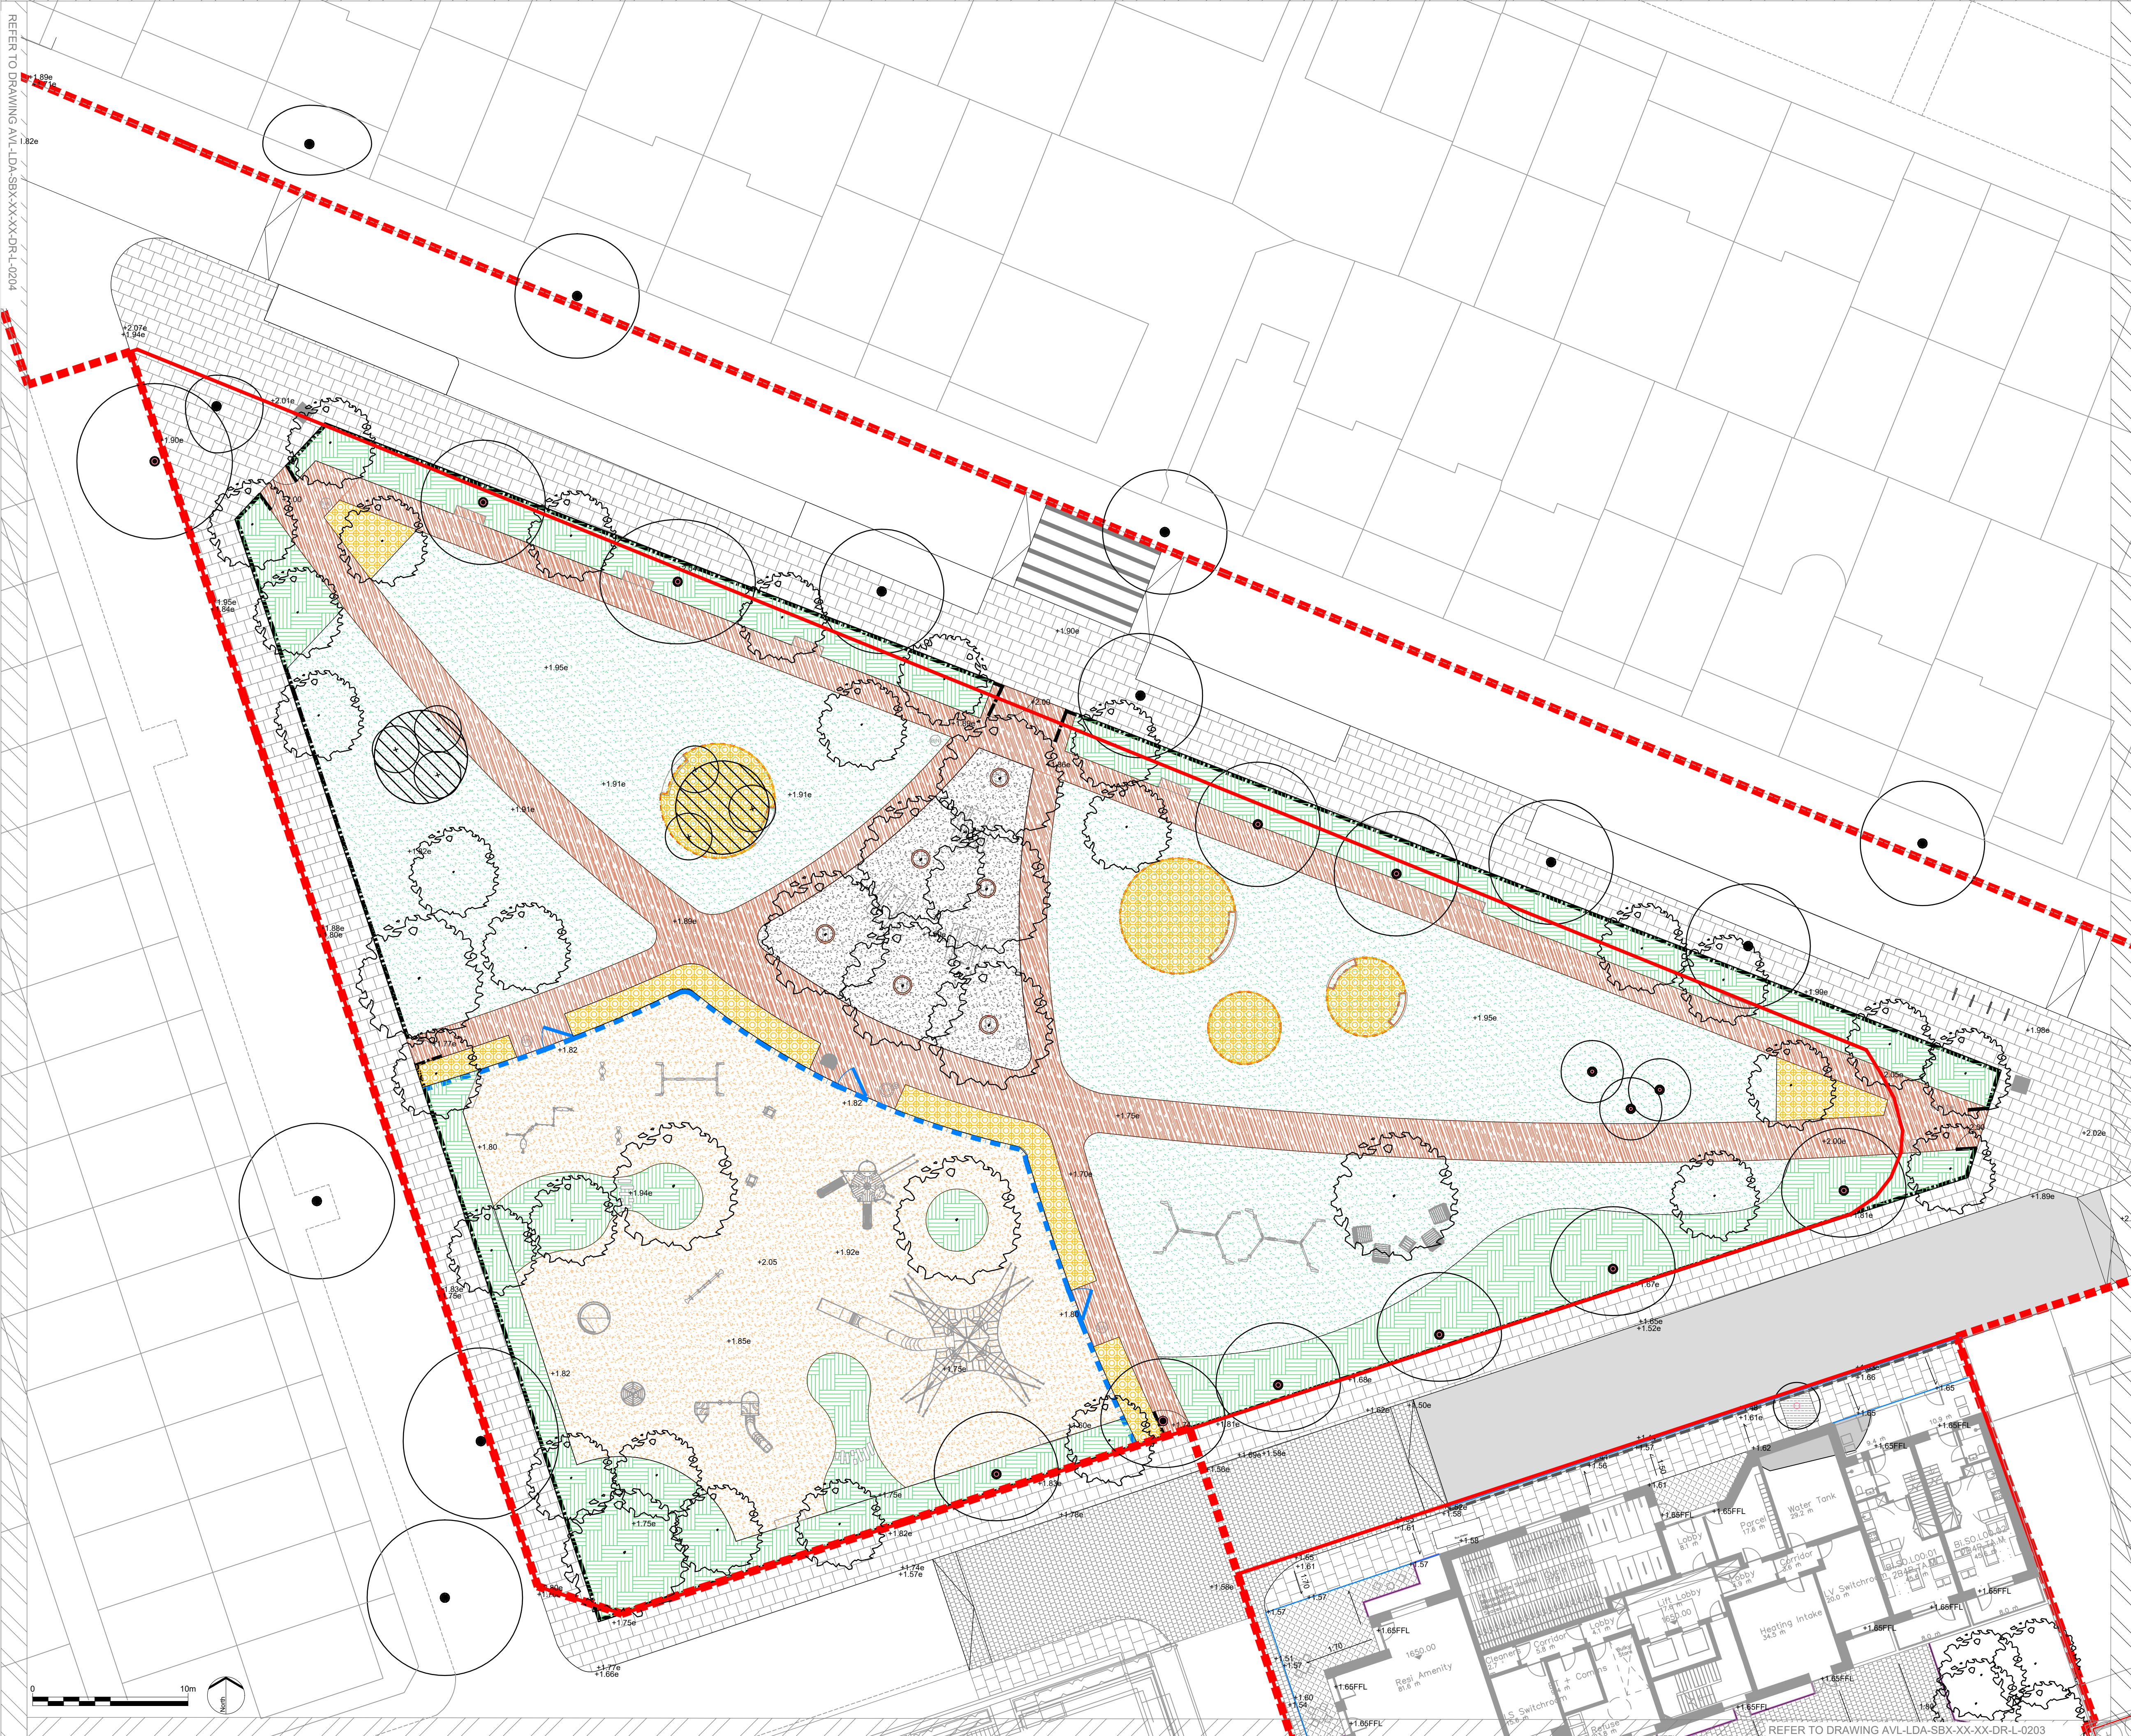

LOCATION PLAN

P02	Redline boundary & Km Rd update	25.03.22
P01	For information	14.10.21
REV.	DESCRIPTION	ATP. DATE

LDĀDESIGN

PROJECT TITLE
ABERFELDY VILLAGE

DRAWING TITLE
PHASE A - Public Realm and Landscape Detail
Plan 06 - Braithwaite Park

ISSUED BY	London	T: 020 7467 1470	
DATE	Oct'21	DRAWN	EJ
SCALE	A1 1:200	CHECKED	WCC
STATUS	Planning	APPROVED	AH

DWG. NO AVL-LDA-SBX-XX-XX-DR-L-0205

No dimensions are to be scaled from this drawing. All dimensions are to be checked on site. Area measurements for indicative purposes only.

© LDA Design Consulting LLP. Quality Assured to BS EN ISO 9001: 2000

Sources: Ordnance Survey